


LEISTER

PROCESS HEAT

F. Jannone AG

Offizieller Vertriebspartner

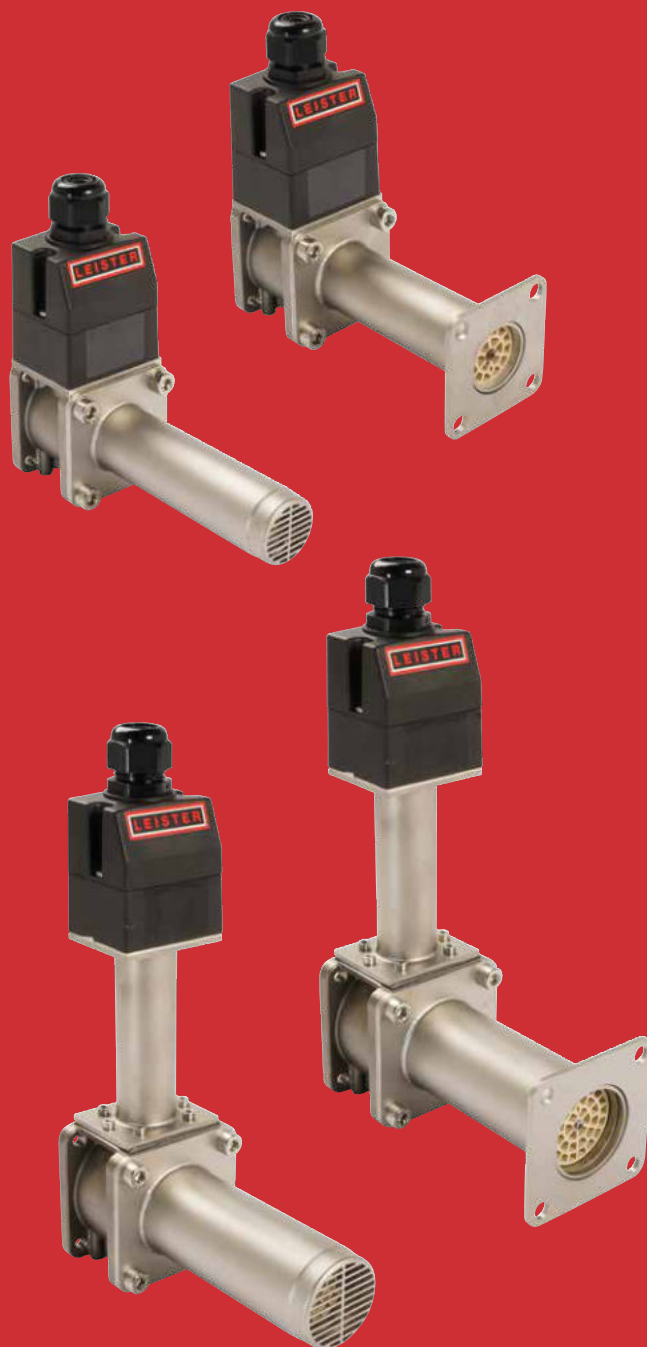

General Catalog

Process Heat

Intelligent and efficient
hot-air solutions.



Leister Technologies AG, Corporate Center, Kaegiswil, Switzerland



Leister Technologies AG, factory, Sarnen, Switzerland



Leister Technologies AG, factory, Kaegiswil, Switzerland



Leister Technologies Ltd.
Shanghai, China



Leister Technologies GmbH
Hagen, Germany



Leister Technologies Benelux B.V.
Houten, Holland



Leister Technologies Italia S.r.l.
Milan, Italy



Leister Technologies LLC
Itasca, USA



Leister Technologies KK
Yokohama, Japan



Leister Technologies India Pvt. Ltd.
Chennai, India

Leister delivers performance.

For 70 years, Leister has been the worldwide leader in the field of plastic welding and industrial hot-air applications. In addition we also offer innovative and effective lasersystems and microsystems. Leister is proud to develop and produce all products in Switzerland – so you can always rely on the proverbial Swiss made quality.

Over 98 percent of our products are exported. With an established network of 130 sales and service centers all over the globe, you will find a Leister partner guaranteed. We are local worldwide.



PLASTIC WELDING

For decades now, Leister has been the worldwide market leader. The performance and reliability of our products makes Leister the first choice. Our tools are used in roofing, billboards, tarpaulins, civil engineering, tunneling, landfills, flooring, plastic fabrication, and shrinking to name a few.




PROCESS HEAT

Hot-air is increasingly deployed in industrial processes. Typical applications include activating, heating, curing, melting, shrinking, welding, sterilizing, drying and warming to name a few. Leister customers profit from our extensive engineering knowledge and benefit from our recommendations during the conceptual design of hot-air applications.



LASER PLASTIC WELDING

Leister's innovative and patented laser bonding solutions provide alternative production processes in automotive, medical, sensor, electronics and textile manufacturing as well as microsystems technology. Our clean, precise and non-invasive laser technology can also be applied to process heat applications.

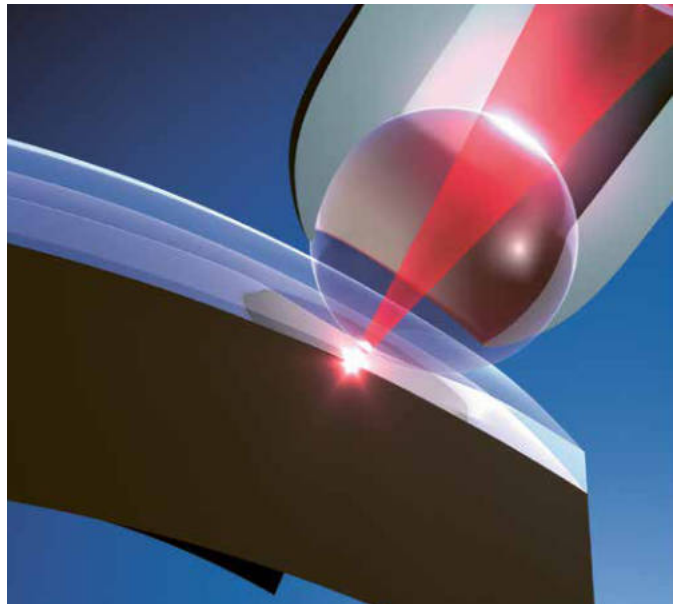

Hot-air for industrial processes

Wherever you need heat, Leister Technologies AG provides high quality hot-air blowers, air heaters and blowers. Additionally, a wide range of accessories facilitate integration of the equipment into production processes. There is a wide range of applications – Leister offers the appropriate solution.

Research and development

With years of experience in plastic processing and industrial processes we are the ideal partner to work your application. We take pride in consistently developing new and innovative products as well as continually improving existing products. We strive to provide our customers with outstanding quality, reliability, performance and cost-efficient products.

Quality management

As an innovator, Leister commits to transparent and consistent quality management. Leister Technologies AG is certified to comply with the ISO 9001 quality standards. All processes are regularly audited and improved to comply with all quality-relevant criteria; therefore, our products enjoy a reputation of providing reliable service even after years of use - even under adverse conditions!

Testing and certification


Our products are designed and developed to comply with nationally and internationally recognized standards. These include both product-specific standards – such as ISO, IEC, EN or UL standards – as well as application-specific standards. For our client's protection, tests are carried out by accredited and independent test institutes. The products are then certified and qualified to carry the conformity marking.


Application and laboratory testing

Our team of experts will assist you in choosing the right equipment for your application process. Running a series of tests on your applications will help optimize processes. Leister's internal applications laboratory allows for comprehensive testing of all manufactured tools and equipment. This testing provides accurate process analysis and documentation to our customers.

More than 130 Sales and Service Centers in over 100 countries

We believe that the basis for customer satisfaction lies within the quality of our products and the smooth operation of our global service network. A close network of more than 130 sales and service centers in more than 100 countries ensures competent and responsive service. Distributors and their staff are trained and certified by Leister on a regular basis; therefore, Leister know-how is locally available to you at all times.

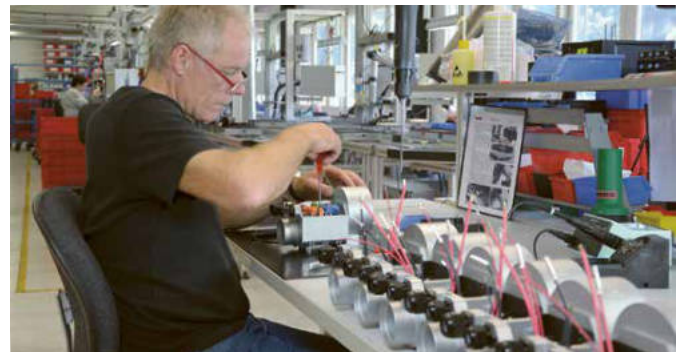

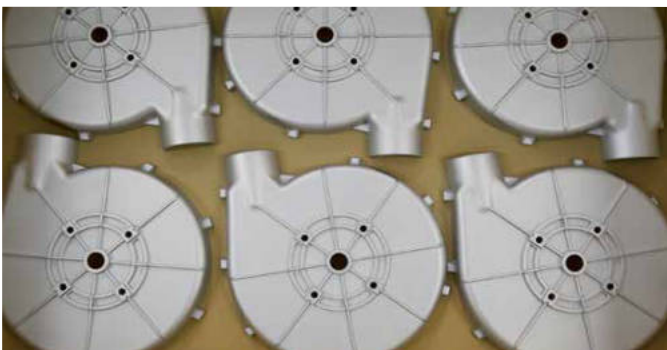

Leister hot-air technology: Proven thousands of times.

- heating
- shrinking
- welding
- activating or detaching
- igniting and burning
- removing
- separating or fusing
- pasteurizing and sterilizing
- smoothing and shining
- accelerating
- dissolving
- connecting
- simulating
- de-icing
- inspecting

Food industry: To ensure that candy looks as good as it tastes, it is smoothed after production using precisely controlled hot air from Leister.



Paper industry: Freshly printed paper – from simple labels to banknotes – is often dried with hot-air after printing to ensure high print quality while enabling faster processing speeds.



Automotive industry: To permanently attach interior panels and plastic trim, plastic rivets have to be heated and the rivet heads formed with cold dyes. Using several Leister LE MINIs, the individual rivets can be heated simultaneously with pinpoint precision.



Brewing and beverage industry: Shrinkable plastics are increasingly replacing metal caps. A Leister HOTWIND or an LHS series air heater with the appropriate blower supplies the reflector with hot air.



Cosmetics: Hot air is used in several stages during the production of lipstick. For example, to give the lipstick a glossy finish. Afterwards, a plastic film is shrunk onto the product using hot-air during packaging.

Logistics: To ensure the pallets' load doesn't separate or spill, a PE shrink film cover is placed over it and shrunk using a Leister hot-air blower.



Food industry: Coffee can be roasted with hot air using Leister products. To ensure high quality roasting, the temperature is precisely controlled.



Food industry: Thanks to Leister, the PE-coated milk carton can be dried, sterilized and welded.



Why do our customers trust Leister?

Leister hot-air systems are deployed in countless industrial production processes. There is hardly an industry which does not profit from the diverse advantages – whether through cost-effectiveness or because many processes simply become more efficient with hot air.

Know-how

Decades of experience in plastics processing and in industrial processes make us the ideal hot-air technology partner.

Consulting

As the worldwide market leader with our network of more than 130 sales and service centers in more than 100 countries — we are always local and can provide assistance at your location.

Extensive Leister product range

Every hot-air application in all industrial processes can be matched with products from Leister.

Our extensive product range includes:

- Innovative, system-compatible air heaters
- Powerful, robust blowers
- Compact, flexible hot-air blowers
- Comprehensive range of accessories

Customized solutions

Along with our broad product range, we also offer products developed according to your individual specifications.

Development

We constantly develop and optimize our products. Our customers benefit from continuous improvement, high quality, reliability, performance and cost-effectiveness.


Application laboratory

Our application laboratory is equipped with the most up-to-date measuring equipment and therefore extremely well-suited for simulating applications and processes. With this service, we support you in finding a fast and efficient solution.

Independent safety testing

Independent testing is yet another feature Leister offers to ensure top quality and safety of our products. All Leister air heaters and hot-air blowers are tested by the independent test center “Electrosuisse”.

Combination options with air heaters, blowers and temperature regulators.

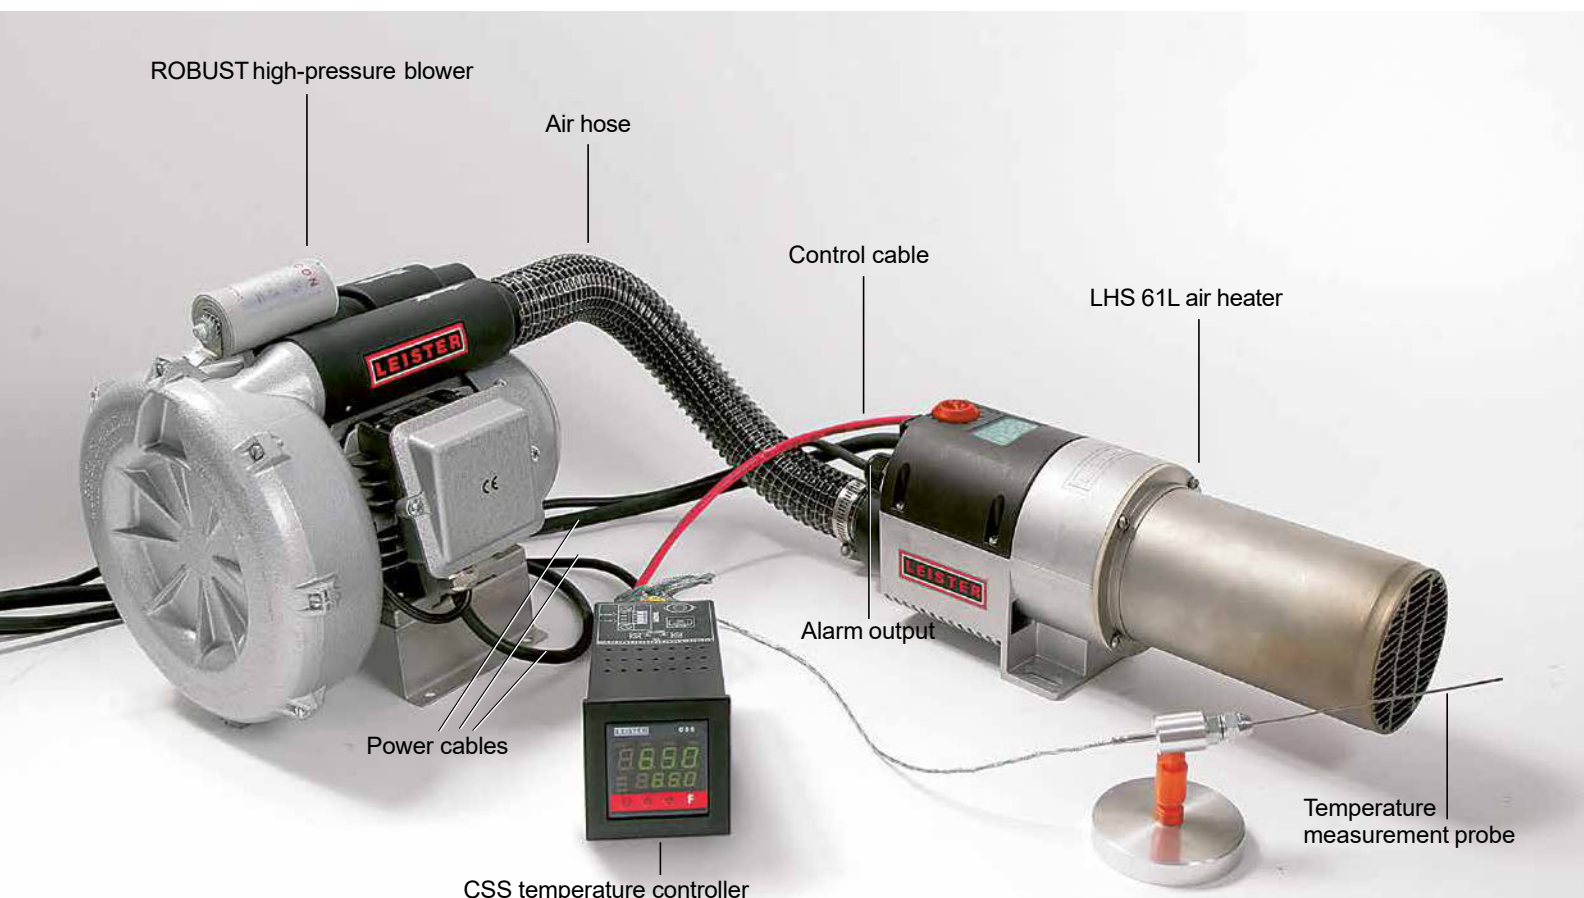



Contents

Hot-air Blowers

10 – 21



Hot-air Blowers

Air Heaters

22 – 60

Controllers

61 – 63



Air Heaters
Controllers

Blowers

64 – 71

Accessories

72 – 73

Frequency Converters

74



Blowers
Frequency Converters

Conversion Table

75

Useful Formulas

76 – 77

$$V = R * I$$

$$P = V * I$$

$$I = \frac{P}{V}$$


Useful Formulas





Hot-air Blowers

MISTRAL	12 / 13
HOTWIND PREMIUM / HOTWIND SYSTEM	14 / 15
MISTRAL accessories	16
HOTWIND accessories	17
VULCAN SYSTEM	18
VULCAN SYSTEM accessories	19
IGNITERBM4/BR4	20
IGNITERBM4/BR4 Accessories	21

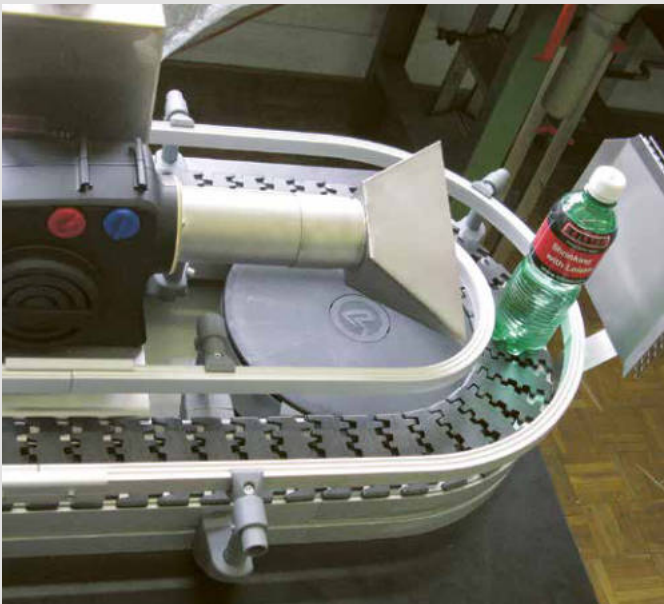

The new MISTRAL: The incomparable hot-air blower.

Two model groups are available in this range – the MISTRAL 2, 4, and 6 PREMIUM, and the top-of-the-range MISTRAL 6 SYSTEM. All MISTRAL 6 devices are equipped with a maintenance-free brushless blower motor, making them perfectly-suited to continuous operation. The MISTRAL 6 SYSTEM can either be operated using its integrated controls or via an external system interface.

Hot-air blower






MISTRAL PREMIUM / SYSTEM

1		Maintenance-free Thanks to its brushless motor, the new MISTRAL® PREMIUM/ SYSTEM is perfectly suited to continuous operation
2 / 3		Innovative: Using the "e-drive" operating unit, the air volume and temperature for the MISTRAL SYSTEM can be adjusted to suit every application. Fully-integrated: Main switch with integrated push button function for programming (MISTRAL SYSTEM).
4		Multifaceted: Can be operated as a device with integrated control or via an external system interface for integration into a closed-loop system (MISTRAL SYSTEM).
5		Informed: Display with user status information and programming (MISTRAL SYSTEM).

	PREMIUM			SYSTEM
	2	4	6	6
Brushless blower motor			•	•
Brush motor with replacement carbon brushes		•		
Brush motor	•			
Integrated heating element and tool protection	•	•	•	•
Integrated code switch for potentiometer (internal / external)	•	•	•	
Infinitely adjustable heating capacity and air volume with the "e-drive"				•
Automatic cool-down function				•
Remote control interface for temperature / air volume				•
Integrated temperature probe				•
Target / actual values display				•



MISTRAL SYSTEM

6		Innovative design: Special baffle for an even airflow distribution and an optimised, aerodynamic airflow velocity.
7		Integrated: Thermocouple in the MISTRAL SYSTEM for enhanced precision.
8		Quick to connect: Thanks to the integrated air-hose connection adapter with its internal 1-inch thread, an additional adapter is not required.
9		Convenient: Its state-of-the-art industrial design and convenient mounting tabs are sure to impress.
10		Automatic cooling: The MISTRAL SYSTEM is equipped with an automatic cool-down function. In the MISTRAL PREMIUM, the blower and heater can be controlled separately.
11		Easy to switch: The MISTRAL PREMIUM can be switched from an internal to an external potentiometer (optional). As a result, the temperature can even be controlled from the outside.

Hot-air blower




MISTRAL PREMIUM / SYSTEM



MISTRAL PREMIUM

Installation dimensions in mm

	A	B	C
230 V / 2300 W 100 V / 1500 W	Ø 36.5	106.8	321.2
230 V / 4500 W	Ø 50	137.8	352.2
230 V / 3400 W 120 V / 2400 W 200 V / 3000 W 220 V / 3100 W	Ø 50	108	322.5

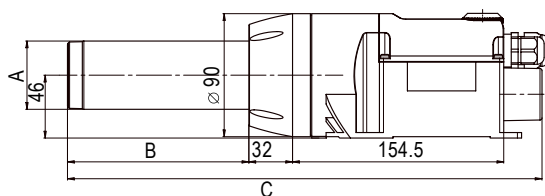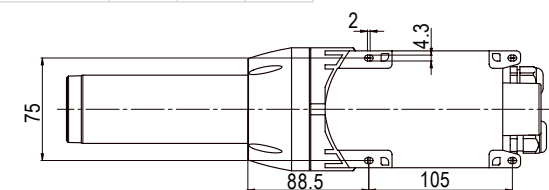


Technical data	MISTRAL 2, 4, 6 PREMIUM						
Model	2	4	6	6	6	6	6
Voltage	V~	230	120	120	230	230	220
Power	W	3400	2400	2400	2300	3400	4500
Temperature open	°C	520	490	430	500	510	650
Max. air volume(20°C)	l/ min.	350	300	350	300	350	400
Pressure	kPa	3.5	3.5	2.5	2.5	2.5	3.0
Weight	kg	1.4	1.4	1.4	1.4	1.4	1.5
Ø	mm	50	50	50	36.5	50	50
Conformity mark	CE CE c RU us CE						
Article no. MISTRAL 2, 4, 6 PREMIUM	147.963	147.964	147.965	148.006	147.966	147.967	146.522

Model	MISTRAL 6 SYSTEM						
Voltage	V~	100	120	200	230	230	220
Power	W	1500	2400	3000	2300	3400	4500
Temperature open	°C	650	650	650	650	650	650
Air volume (20°C) min.	l/ min.	100	100	100	100	100	100
max.		300	350	350	300	350	400
Pressure	kPa	3.5	3.5	3.5	3.5	3.5	3.5
Weight	kg	1.2	1.4	1.4	1.2	1.4	1.4
Ø	mm	36.5	50	50	36.5	50	50
Conformity mark	CE CE c RU us CE						
Article no. MISTRAL 6 SYSTEM	147.972	147.969	147.973	147.975	146.701	147.968	146.524

Frequency	Hz	50 / 60
Emission levels	dB(A)	65
Dimensions	see bottom left	
Protection class II	<input type="checkbox"/>	
Approval mark	S	

We reserve the right to make technical changes

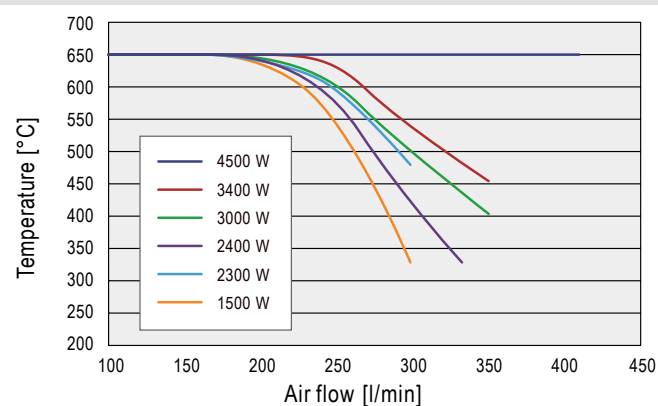

Accessories



HOTWIND PREMIUM / SYSTEM: The versatile hot-air blower.

Its brushless motor ensures that this hot-air blower has a long service life. The air volume can now be set infinitely up to 900 l/min via the potentiometer. The wide range of applications makes the new HOTWIND SYSTEM truly impressive: be it as a unit with integrated control or as a unit for integration in a closed-loop control circuit using a system interface.

Hot-air blower

HOTWIND PREMIUM / SYSTEM



HOTWIND SYSTEM

1		Infinitely adjustable: Potentiometers for stepless adjustment of the heater and blower (PREMIUM and SYSTEM).
2		Remote controlled: Interface with alarm contact in the HOTWIND SYSTEM for controlling the air volume and heat output, using 4 – 20 [mA] or 0 – 10 [V] signal.
3		Integrated: Thermocouple in the HOTWIND SYSTEM for even greater precision.
4		User friendly: Display on the HOTWIND SYSTEM provides the user with status information.
5		Cleverly combined: Main switch with integral function button for programming (SYSTEM).
6		Automatic cooling: HOTWIND PREMIUM and HOTWIND SYSTEM are equipped with an automatic cool-down function.

	PREMIUM	SYSTEM
Heat output and air volume steplessly adjustable with potentiometer	•	•
Integrated power electronics	•	•
Protection against heating element or device overheating	•	•
Brushless blower motor	•	•
Alarm output		•
Integrated temperature probe		•
Integrated temperature control		•
Remote control interface for temperature or power set point		•
Remote control interface for air volume adjustment		•
Display for showing the setpoint and actual values (°C or °F)		•



Hot-air blower

HOTWIND PREMIUM / SYSTEM







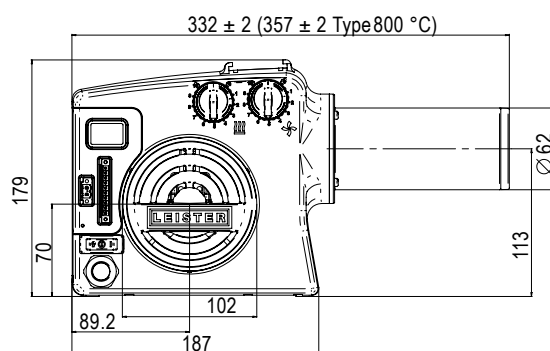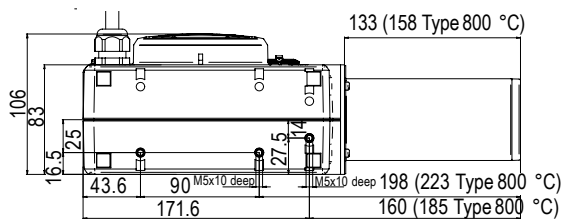












HOTWIND PREMIUM


Installation dimensions in mm



Technical data HOTWIND PREMIUM / HOTWIND SYSTEM

Voltage	V~	120	230	230	230	230	230	400	220
Power consumption	W	2300	2300	2300	3100	3680	3680	5400	3350
Frequency	Hz	50 / 60							60
Max. air outlet-temperature	°C	650	650	650	800	650	650	650	650
Air flow (20°C)	l/min.	200 – 900							
Static pressure	kPa	0.8	1.0						
Noise emission	dB(A)	< 70							
Weight without cable	kg	2.2			2.3	2.2		2.4	2.2
Dimensions		see below							
Protection class II									
Conformity mark		 <small>C</small>	 <small>CE</small>	 <small>C</small>	 <small>CE</small>	 <small>C</small>	 <small>CE</small>	 <small>C</small>	 <small>CE</small>
Safety standard		 <small>Ⓢ</small>	 <small>Ⓢ</small>	 <small>Ⓢ</small>	 <small>Ⓢ</small>	 <small>Ⓢ</small>	 <small>Ⓢ</small>	 <small>Ⓢ</small>	 <small>Ⓢ</small>
Without connecting plug	
Connecting plug (Euro)	
Connecting plug (Korea)	
order. No. HOTWIND PREMIUM		140.095	142.612	142.643	142.608	142.609	140.098	142.644	143.299
order. No. HOTWIND SYSTEM *		142.636	142.646	140.096		142.645	142.640	142.641	143.804

* Note: Interface with cover, connecting plug included.

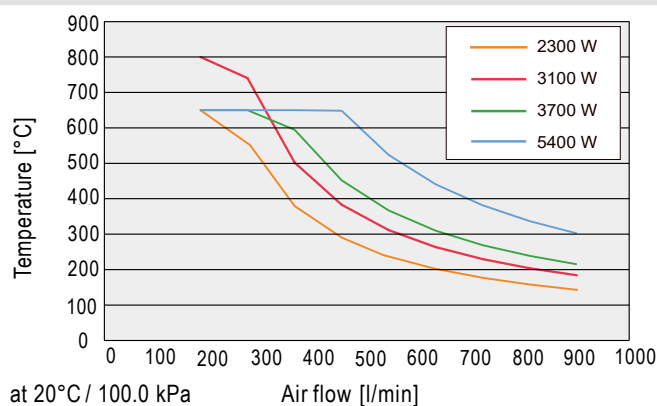Subject to change without notice.
Connection voltage non-switchable.

Accessories





Accessories MISTRAL PREMIUM / SYSTEM (Ø 50 mm)

	107.254	Flange connector, push-fit a = 70 mm		107.286	PVC air hose Ø 38 mm
	122.332 122.924	Nozzle adapter, push-fit (a x b) from (a) Ø 50 mm to (b) Ø 62 mm from (a) Ø 50 mm to (b) Ø 37 mm		107.287	Hose clip for Ø 38 and 60 mm air hose
	107.255	Extension nozzle, push-fit (a x b) 160 x 36.5 mm		106.127	Sieve reflector «douche» (Ø 50.5 mm) Ø 65
	105.950 107.257 105.955 105.952	Tubular nozzle, push-fit (a x b x c) 460 x 300 x 2 mm 590 x 420 x 1.7 mm 836 x 660 x 1 mm 900 x 800 x 0.9 mm		153.245	Stainless steel filter kit (Ø 38 mm), push-fit on air intake
	107.256	Angled nozzle, push-fit (a x b) shank length 106 x 162, Ø 50 mm		106.956	Thermocouple with plug 1 m cable
	105.961 107.258	Wide slot nozzle, push-fit (a x b) 45 x 12 mm, length 350 mm 70 x 10 mm		Thermocouple extension cable with plug and connection 106.958 2 m 106.960 4 m 106.962 10 m	
	106.057 106.060 107.270 106.061	Wide slot nozzle, push-fit (a x b) 100 x 4 mm 150 x 6 mm 150 x 12 mm 300 x 6 mm		123.039	CSS – Temperature controller (MISTRAL SYSTEM)
	107.331	Hinged reflector, push-fit (d x b) 70 x 70 mm		137.720	E5CC – Digital temperature controller (MISTRAL SYSTEM)
	107.340	Shell reflector, push-fit (a x b) 45 x 250 mm		148.812	External potentiometer box, analogue, 10 kΩ, with 3 m signal cable (MISTRAL PREMIUM)
	107.327 107.333	Sieve reflector, push-fit (a x b) 70 x 75 mm 110 x 150 mm	Accessories for Ø 36.5 mm can be found on page 40 (LHS 21 analogue air heaters)		
	107.330	Hinged reflector, push-fit (d x b) 125 x 22 mm			

Accessories HOTWIND PREMIUM / SYSTEM (Ø 62 mm)

	125.317	Flange connector, push-fit a = 90 mm
	107.247	Extension nozzle, push-fit (a x b) 200 x 45 mm
	105.907 105.919 107.253 114.136 105.906	Tubular nozzle, push-fit (a x b x c) 354 x 204 x 4.5 mm 456 x 306 x 3 mm 700 x 550 x 1.7 mm 795 x 655 x 1.5 mm 1100 x 1000 x 4 mm
	107.265	Angled nozzle, push-fit (a x b) shank length 120 x 115, Ø 62 mm
	107.245	Round nozzle, push-fit d = 40 mm
	107.342 106.174 106.175	Shell reflector, push-fit (a x b x c) 50 x 400 x 80 mm 65 x 400 x 95 mm 80 x 400 x 80 mm
	107.260 107.259 105.977 107.263 107.262 105.992 105.991	Wide slot nozzle, push-fit (a x b) 85 x 15 mm 150 x 12 mm 200 x 9 mm 250 x 12 mm, with sieveinsert 300 x 4 mm 400 x 4 mm 500 x 4 mm
	106.143 107.329 107.336	Sieve reflector, push-fit (a x b) 45 x 75 mm 70 x 75 mm 110 x 152 mm
	107.335	Sieve reflector, push-fit Ø 150 mm
	107.248	Stainless steel filter, push-fit on air intake

	141.723	Hand tool kit (handle and protective tube)
	113.351	Extension tube, push-fit (a x b) 275 x Ø 62 mm

VULCAN SYSTEM: The clever muscle man.

The muscle man among the hot-air blowers leaves no doubts about its performance. It is compactly built and easy to integrate into industrial processes. Just as Leister's smaller hot-air blowers, VULCAN SYSTEM can be controlled remotely through a standard analog interface.

Hot-air blower


VULCAN SYSTEM



Voltage	V~	3 × 230		3 × 400		3 × 480	
Power consumption	kW	6	10	6	11	6	11
Order no.		143.407	143.406	143.402	140.463	143.405	143.404











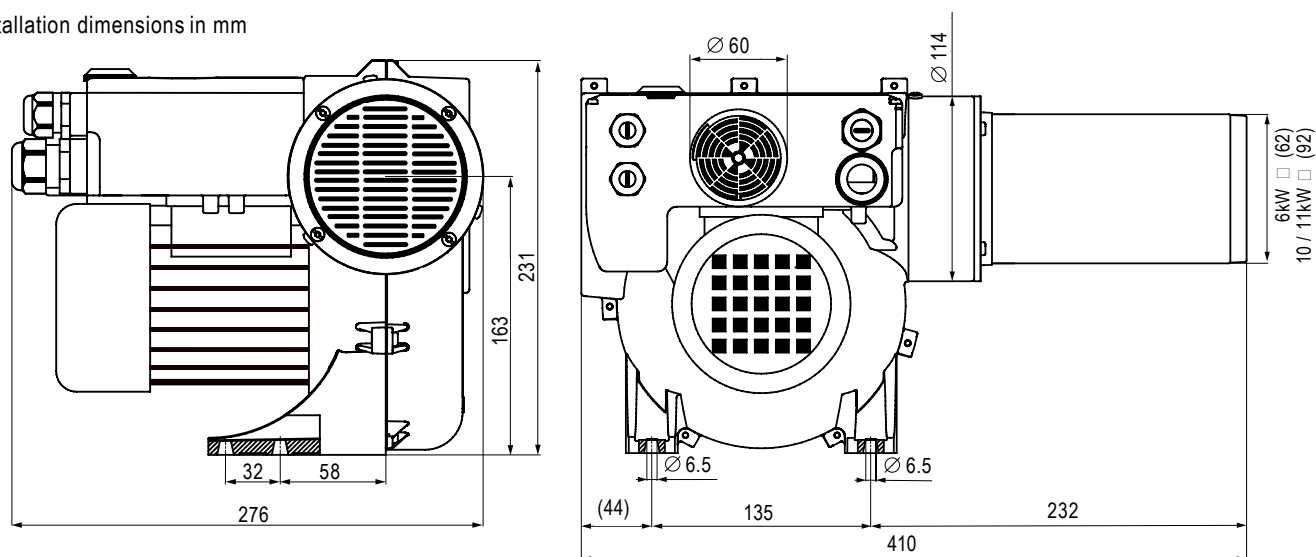Technical Data VULCAN SYSTEM	Frequency	50 Hz	60 Hz
Heating power steplessly adjustable with potentiometer		•	
Standard control interface through a 4 - 20 mA or a 0 - 10 V signal		•	
Integrated power electronics		•	
Protection against heating element or device overheating		•	
Brushless blower motor with FC control		•	
Alarm output		•	
Integrated temperature control		•	
Integrated temperature probe		•	
Display for showing the setpoint and actual values		•	
Max. air outlet temperature °C		650	
Max. air flow l/min (20 °C) 3 × 230 V~		850	1500
Max. air flow l/min (20 °C) 3 × 400 V~ / 3 × 480 V~		950	1700
Static pressure kPa		3.1	4.0
Noise emission level db (A)		65	
Weight (kg)		9.3	
Conformity mark		CE	
Protection class I		⊥	
Safety standard		Ⓢ	

Installation dimensions in mm













Accessories VULCAN SYSTEM

6 kW (Ø 62 mm)

	125.317	Flange connector, push-fit a = 90 mm
	107.245	Round nozzle, push-fit d = 40 mm
	107.247	Extension nozzle, push-fit (a × b) 200 × 45 mm
	107.265	Angled nozzle, push-fit (a × b) shank length 120 × 115, Ø 62 mm
	105.907 105.919 107.253 114.136 105.906	Tubular nozzle, push-fit (a × b × c) 354 × 204 × 4.5 mm 456 × 306 × 3 mm 700 × 550 × 1.7 mm 795 × 655 × 1.5 mm 1100 × 1000 × 4 mm
	107.260 107.259 105.977 107.263 107.262 105.992 105.991	Wide slot nozzle, push-fit (a × b) 85 × 15 mm 150 × 12 mm 200 × 9 mm 250 × 12 mm, with sieveinsert 300 × 4 mm 400 × 4 mm 500 × 4 mm
	107.342 106.174 106.175	Shell reflector, push-fit (a × b × c) 50 × 400 × 80 mm 65 × 400 × 95 mm 80 × 400 × 80 mm
	106.143 107.329 107.336	Sieve reflector, push-fit (a × b) 45 × 75 mm 70 × 75 mm 110 × 152 mm
	107.335	Sieve reflector, push-fit Ø 150 mm
	107.277	Stainless steel filter, push-fit on air intake

Accessories VULCAN SYSTEM

10/11 kW (Ø 92 mm)

	125.318	Flange connector, push-fit a = 120 mm
	107.244	Round nozzle, push-fit d = 50 mm
	107.273	Extension nozzle, push-fit (a × b) 500 × 60 mm
	107.269	Angled nozzle, push-fit (a × b) shank length 175 × 175 mm
	106.031 106.035 107.268 106.033	Tubular nozzle, push-fit (a × b × c) 1000 × 800 × 2 mm 1185 × 900 × 1.6 mm 1288 × 1000 × 1.5 mm 1550 × 1350 × 1.1 mm
	107.274 106.028 107.272 106.018 106.024 107.267 106.023 106.026	Wide slot nozzle, push-fit (a × b) 130 × 17 mm 220 × 12 mm 300 × 12 mm 400 × 10 mm 500 × 7 mm 500 × 15 mm 600 × 4 mm 600 × 9 mm
	107.341	Shell reflector, push-fit (a × b) 160 × 370 mm
	107.276	Sieve reflector, push-fit Ø 260 mm
	107.277	Stainless steel filter, push-fit on air intake
	133.517	Thermocouple holder

IGNITERBM4 / BR4 – Ignites just about anything.

The new IGNITERignition blower from Leister has been specially developed for installation into pellet and wood chip boilers. The IGNITERBR4 with 3.4 kW has what it takes. The interface was selected so that the ignition blowers can easily be installed into any heating boiler.


Hot-air blower

IGNITER

1		Easy: Connector plug located directly on the device means easy removal and installation and fewer device configurations.
2		Clever: New assembly support for positioning in the furnace.
3		Linked: Connection adapter for air hose located directly on the device with inner 1" thread (no extra accessories needed).
4		Additional: Pipe joint adapter with M14 thread for easy adaptation of the heat conduction lines and extensions (available only for IGNITERBM4).
5		Protected: Heating element protection with phototransistor and device protection via temperature protection circuit.



red dot design award
winner 2013

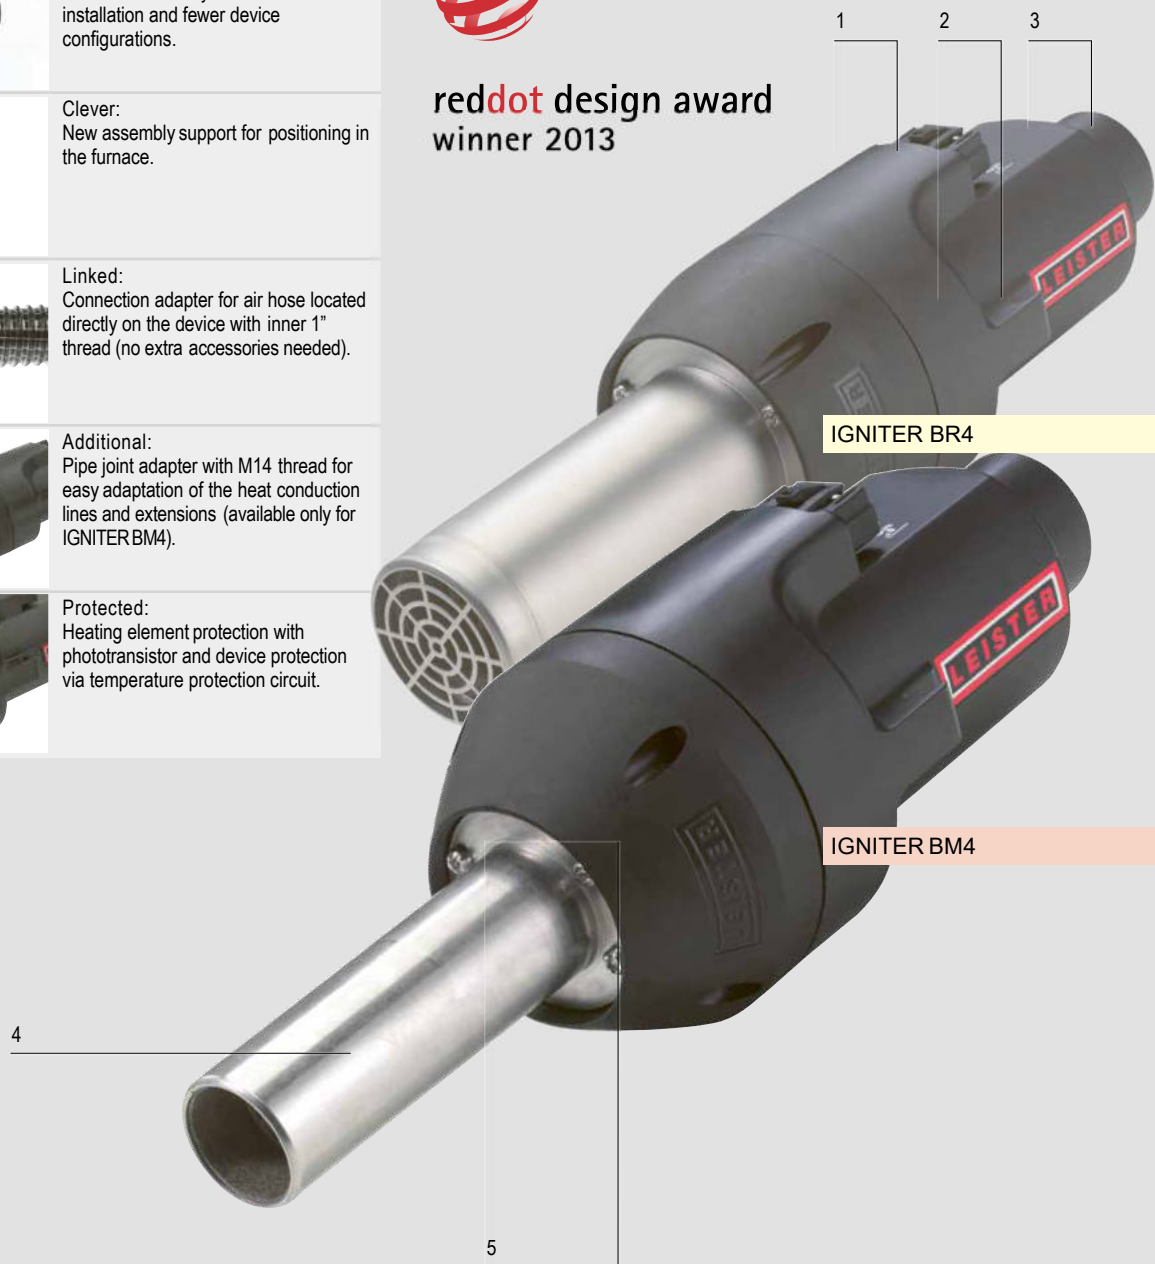

Clean ignition process due to optimum heat level.





Accessories IGNITER

Technical Data		IGNITER BM4								BM4 with M14 screw adapter	BM4 with 3/8" screw adapter	BR4
Voltage	V	120	120	230	230	230	230	230	230	230	230	230
Frequency	Hz	50 / 60										
Power rating	W	1100	1550	600	1100	1600	1100	1600	1100	1600	1100	3400
Min. air volume	l/min 20°C	230	230	80	230	230	230	230	230	230	230	360
Air pressure	kPa	2.48	2.48	0.3	2.48	2.48	2.48	2.48	2.48	2.48	2.48	4.00
Max temperature	°C	600	600	500	600	600	600	600	600	600	600	650
Noise emission level	dB (A)	68	68	58	68	68	68	68	68	68	68	68
Aperture	mm Ø	90										
Weight	kg	1.0 (without power supply cord)										1.2
Length	mm	283										294
Conformity mark		CE cULus										CE
Safety standard		§										
Certification		CCA										
Protection class II		□										
Article no.		141.882	141.881	139.232	140.711	1139.231	1144.012	145.449	142.421	146.296		

We reserve the right to make technical changes.
Plug for cable connection and cable are not included.

	156.095	Heater tube 3/8" for extensions
	156.094	Heater tube M14 for extensions
	153.245	Stainless steel filter kit (Ø 38 mm), push-fit on air intake
	107.286	PVC Air hose Ø 38 mm / Ø 1.5 in
	107.287	Hose bracket for hose Ø 38 mm / Ø 1.5 in and Ø 60 mm / Ø 2.4 in
	142.717	Heating element 230 V~ 1550 W
	150.871	Heating element 230 V~ 1050 W
	150.872	Heating element 230 V~ 550 W
	142.718	Heating element 120 V~ 1500 W
	150.873	Heating element 120 V~ 1050 W
	145.606	Heating element (BR4) 230V~ 3300W
	142.967	Power supply cord (rubber) with WAGO plug 3 x 1 mm² x 3 m
	143.131	Power supply cord (silicone) with WAGO plug 3 x 1 mm² x 3 m
	142.976	Plug with strain relief, kit (WAGO770) cable Ø 4.5 – 8 mm
	148.429 (BR4)	Plug with strain relief, kit (WAGO770) cable Ø 8 – 11.5 mm
	142.359	Accessory adapter to TRIACS Economy heating pipe

Installation dimensions in mm

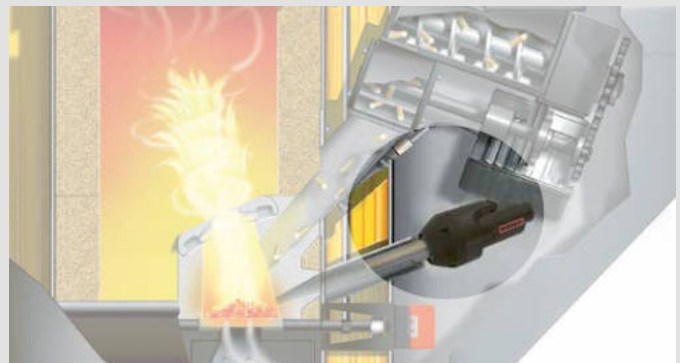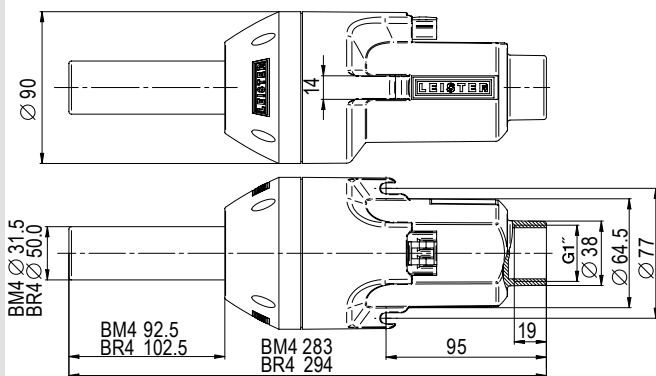

Installation arrangement






Air Heaters / Controllers

Comparison LHS - overview	24 / 25
LHS 15	26 / 27
LHS 21	28 / 29
LHS 41	30 / 31
LHS 61	32 / 33
LHS 91	34 / 35
LHS 210	38
LHS 410	40
LE 5000 High Temperature	42
LE 10000 High Temperature	43
LE MINI	44
LE MINI accessories	45
LHS 15 / 21 / 41 accessories	46 / 47
LHS 61 / 91 accessories	48 / 49
LHS 210 / 410 accessories	50 / 51
LE 5000 HT / LE 10000 HT accessories	49
Saving Energy with Leister	52
LE 10000 DF-C Double-Flange	53
LE 5000 Double-Flange	54
LE 10000 Double-Flange	55
Double-flange accessories	56
Key indicators	57
Temperature controllers CSS EASY / CSS	58
Accessories	59

Leister's air heaters: From mini to giant.

Leister's air heater highlight:
The LHS series.

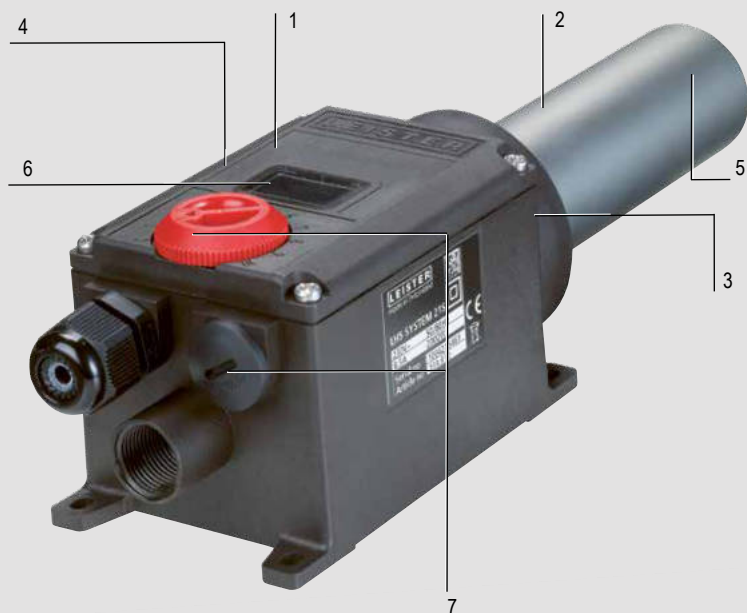

Picture: LHS 21S SYSTEM (p. 28 – 29)

1		Compact: Small dimensions for installation in tight spaces.
2		Reliable: Very durable heating elements thanks to innovative, patented heating element protection.
3		Easy Maintenance: Faster and easier heating element change.
4		Power electronics: External power control becomes obsolete and system design times are reduced.
5		Thermocouple: The integral thermocouple in SYSTEM devices improves precision and enables reproducibility.
6		User friendly: The display of the SYSTEM devices provides users precise local information.

7 Professional integration or controlled stand-alone operation

Operation modes LHS SYSTEM	Control mode	Adjustment mode
Internal (potentiometer) set point.	Temperature set point by potentiometer. Display shows temperature set point and actual temperature.	Capacity set point by potentiometer. Display shows capacity set point in % and actual temperature.
External (interface) set point.	Temperature set point by external controller. Display shows temperature set point and actual temperature.	Capacity set point by external controller. Display shows capacity set point in % and actual temperature.





The LHS air heater family

The LHS air heater family covers an impressive power range from 550 W to 40 kW. The diversity of this portfolio makes it ideal for practically all hot-air applications. By choosing LHS air heaters, you are investing in devices that are manufactured using state-of-the-art technology. Between them, the CLASSIC, PREMIUM and SYSTEM models offer the ideal solutions for users' differing requirements.

Features	CLASSIC	PREMIUM	SYSTEM
Easy to integrate (mounted from above)	✓	✓	✓
Overheat detection with alarm output for the heating element	✓		
Tool overheat detection with alarm output	✓		
Overheat protection with alarm output for the heating element		✓	✓
Tool overheat protection with alarm output		✓	✓
Infinitely adjustable heating capacity via potentiometer		✓	✓
Remote control via analogue interface (4 – 20 mA or 0 – 10 V)			✓
Various open-loop and closed-loop control modes available for selection			✓ *
LED display (target/actual value display)			✓ *
* = except the LHS 91 SYSTEM			

Air Heaters
Controllers

Alongside its optimised design and traditional Leister quality, the patented heating element protection guarantees yet another increase to the service life of the heating element. Thanks to their built-in temperature probes and controllers, integrating the LHS SYSTEM air heaters has never been easier. The integrated power electronics make external power controls a thing of the past and even simplify the wiring.

					
Model	LHS 15	LHS 21	LHS 41	LHS 61	LHS 91
		S L	S L	S L	
Power Range from – to	0.55 kW 0.77 kW	1.0 kW 2.0 kW 3.3 kW 3.3 kW	2.0 kW 3.6 kW 2.0 kW 5.5 kW	4.0 kW 9.0 kW 5.0 kW 16 kW	11 kW 40 kW
Catalogue page	26	28	30	32	34

LHS 15: Tiny and reliable.

The tiny air heater provides hot air up to 650 °C. All prominent features of Leister air heaters also are offered with this tiny heater: long-life heating element, reliable protection systems, standard interfaces. Simply summarizing – the same Leister quality as usual. This makes it a perfect tool for applications in Semiconductor, Electronics, Automotive and other industries.

Air heater

LHS 15



Technical data

Max. air outlet temperature	°C	650
Max. air inlet temperature	°C	65
Max. ambient temperature	°C	65
Min. air flow		As per diagram
Max. inlet pressure	kPa	100
Weight	kg	0.48


Conformity mark **CE**

Approval mark **Ⓢ**

Protection class II **□**

Minimum quantity of air at air inlet temperature of 20°C at 100% heating power

Installation dimensions in mm

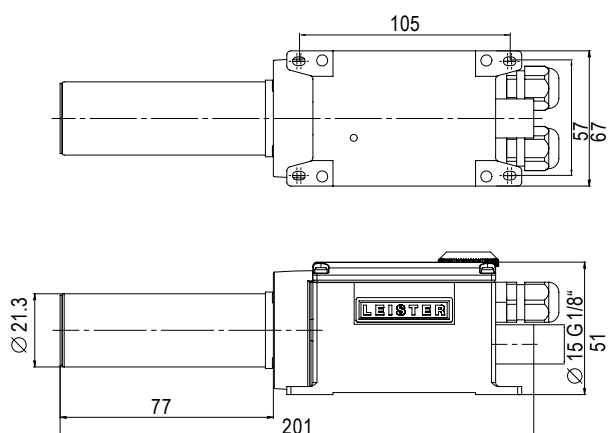

Combination possibilities

- Leister air heater at maximum heat power and without nozzle with Leister blower at 50 Hz, 1.5 m hose length and unimpeded air outflow.
- Hot-air temperature 3 mm after air outlet, measured at the hottest point.
- Air flow at 20°C, 100.0 kPa compliant with ISO6358.

Power Typ	Number LHS 15 x power cons. kW	Air flow l/min.	Temperatur °C
ROBUST	1 × 0.77	1 × 150	420
ROBUST	2 × 0.77	2 × 130	460

Air flow and temperature values may deviate from those above based on the design of the entire hot-air system (including nozzles, air hoses, environmental conditions).

Deflashing foil sleeves from charcoal filter elements



Air heater

LHS 15 CLASSIC



Heating power not adjustable

Detection of heating element and device overheating with alarm output

Air heater

LHS 15 PREMIUM



Heating power steplessly adjustable with potentiometer

Protection against heating element and device overheating with alarm output

Air heater

LHS 15 SYSTEM



Heating power or temperature steplessly adjustable with potentiometer or remote control interface


Protection against heating element and device overheating with alarm output

Remote control interface for external temperature controllers (Leister CSS, or PLCs)

Air Heaters
Controllers

Order no.:	CLASSIC	PREMIUM	SYSTEM
LHS15 0.55 kW/120 V	139.873	139.908	139.894
LHS15 0.77 kW/230 V	139.874	139.893	139.895

Contact a Leister sales partner in your region for professional advice and information on our other air heaters and blowers.

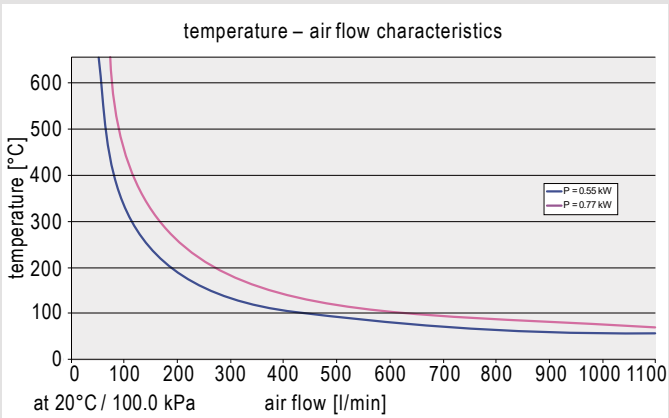

LHS 21: Designed for professionals.

These advanced air heaters are distinguished by their extremely small dimensions – especially the lean design (only 67 mm wide) – as well as their long service life. Designed for professional integration into machine systems, the new LHS series enables any specific application. Sterilizing, drying, welding, cleaning, shrinking, shaping, deburring and activating are now more efficient and reliable thanks to Leister's proven hot-air technology!


Air heater

LHS 21



Technical data		
LHS 21S / 21L		
Max. air outlet temperature	°C	650
Max. air inlet temperature	°C	65
Max. ambient temperature	°C	65
Min. air flow		As per diagram
Max. inlet pressure	kPa	100
Weight 21S / 21L	kg	0.55 / 0.65
Conformity mark		CE
Approval mark		Ⓢ
Protection class II		□
Minimum quantity of air at air inlet temperature of 20°C at 100% heating power		

Installation dimensions in mm

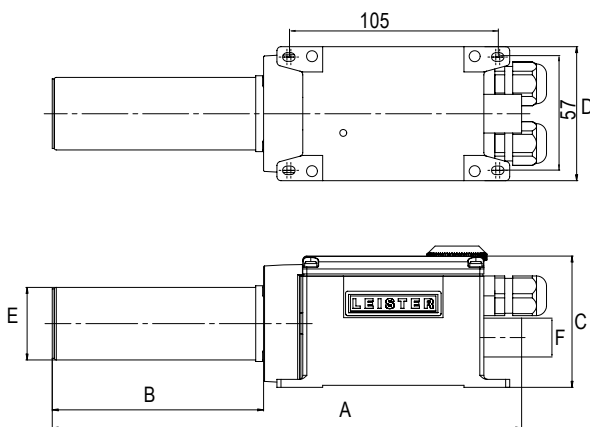

Type	A	B	C	D	E	F
LHS 21S	236	106	66	67	∅ 36.5	∅ 19.5 G3/8"
LHS 21L	266	136	66	67	∅ 36.5	∅ 19.5 G3/8"


Combination possibilities

- Leister air heater at maximum heat power and without nozzle with Leister blower at 50 Hz, 1.5 m hose length and unimpeded air outflow.
- Hot-air temperature 3 mm after air outlet, measured at the hottest point.
- Air flow at 20°C, 100.0 kPa compliant with ISO 6358.

Power Typ	Number LHS 21S x power cons. kW	LHS 21S x Air flow l/min.	LHS 21S Temperature °C
ROBUST	1 × 1.0	1 × 640	160
ROBUST	2 × 1.0	2 × 420	200
ROBUST	4 × 1.0	4 × 240	300
ROBUST	1 × 2.0	1 × 590	300
ROBUST	2 × 2.0	2 × 390	380
ROBUST	4 × 2.0	4 × 220	540
MONO	2 × 1.0	2 × 341	236
MONO	1 × 2.0	1 × 525	333
MONO	2 × 2.0	2 × 353	450
Power Typ	Number LHS 21L x power cons. kW	LHS 21L x Air flow l/min.	LHS 21L Temperature °C
ROBUST	1 × 3.3	1 × 550	520
ROBUST	2 × 3.3	2 × 390	610
AIRPACK	2 × 3.3	2 × 1210	270
AIRPACK	4 × 3.3	4 × 700	340

Air flow and temperature values may deviate from those above based on the design of the entire hot-air system (including nozzles, air hoses, environmental conditions).

High-end air heaters on an indexing table for producing light bulbs.

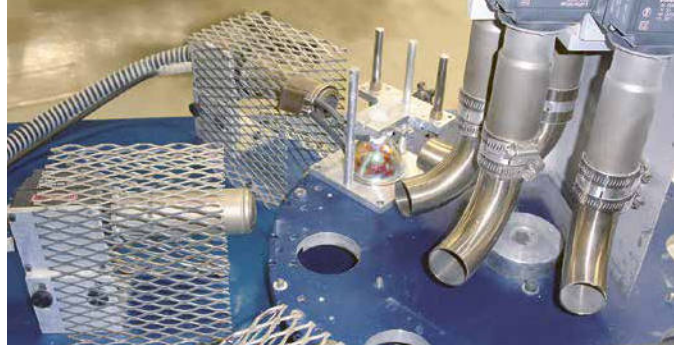

Air heater

LHS 21 CLASSIC



Heating power not adjustable

Detection of heating element and device overheating with alarm output

Air heater

LHS 21 PREMIUM



Heating power steplessly adjustable with potentiometer

Protection against heating element and device overheating with alarm output

Air heater

LHS 21 SYSTEM



Heating power or temperature steplessly adjustable with potentiometer or remote control interface

Protection against heating element and device overheating with alarm output


Remote control interface for external temperature controllers (Leister CSS, or PLCs)

Air Heaters
Controllers

Order No.:		CLASSIC	PREMIUM	SYSTEM
LHS21S	1.0 kW/120V	139.868	140.454	140.458
LHS21S	1.0 kW/230V	139.869	140.455	140.459
LHS21S	2.0 kW/120V	139.870	140.456	140.460
LHS21S	2.0 kW/230V	139.871	139.909	139.910
LHS21L	3.3 kW/230V	139.872	140.457	140.461

Contact a Leister sales partner in your region for professional advice and information on our other air heaters and blowers.

temperature – air flow characteristics

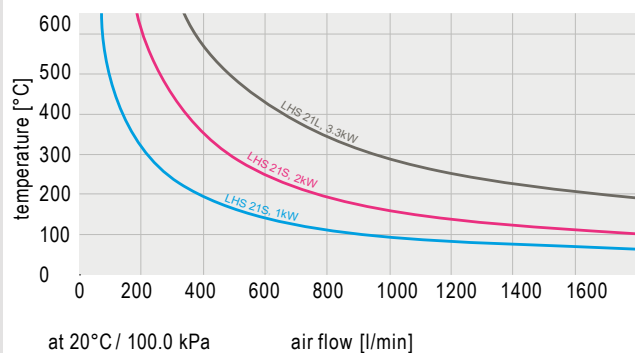

Accessories



LHS 41: Small but high performance.


The medium size LHS 41 series air heaters cover an extremely wide application range. The small footprint enables easy integration into machines. The heater tube diameter of 50 mm allows passing sufficient air flow, also for high performance applications.

Air heater

LHS 41



Technical data		
LHS 41S / 41L		
Max. air outlet temperature	°C	650
Max. air inlet temperature	°C	65
Max. ambient temperature	°C	65
Min. air flow		As per diagram
Max. inlet pressure	kPa	100
Weight 41S / 41L	kg	0.85 / 0.95
Conformity mark		CE
Approval mark		Ⓢ
Protection class II		□
Minimum quantity of air at air inlet temperature of 20°C at 100% heating power		

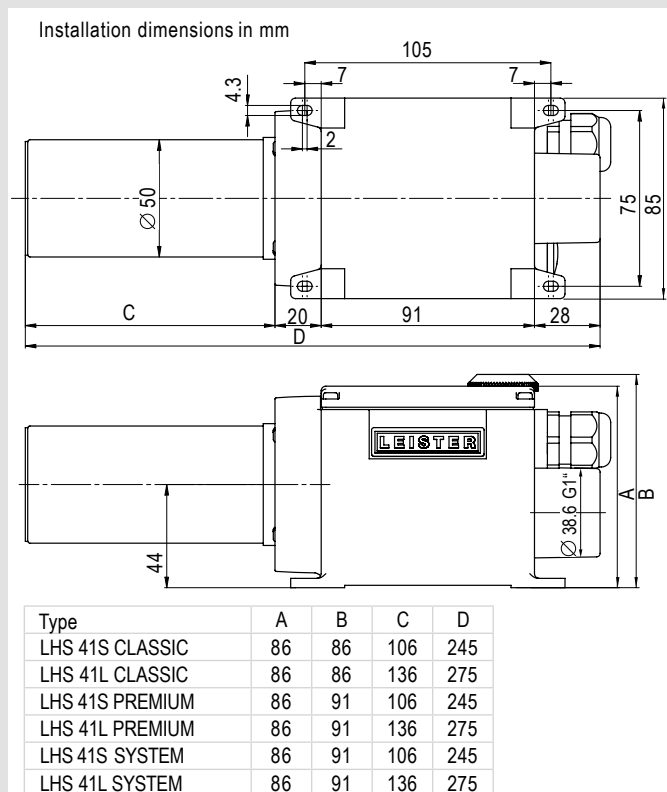


Combination possibilities

- Leister air heater at maximum heat power and without nozzle with Leister blower at 50 Hz, 1.5 m hose length and unimpeded air outflow.
- Hot-air temperature 3 mm after air outlet, measured at the hottest point.
- Air flow at 20°C, 100.0 kPa compliant with ISO6358.

Power Typ	Number LHS 41S x power cons. kW	LHS 41S x Air flow l/min.	LHS 41S Temperature °C
ROBUST	2 x 2.0	2 x 480	300
ROBUST	4 x 2.0	4 x 250	450
ROBUST	1 x 3.6	1 x 810	370
ROBUST	2 x 3.6	2 x 470	540
SILENCE	2 x 2.0	2 x 460	290
SILENCE	4 x 2.0	4 x 380	300
SILENCE	1 x 3.6	1 x 440	600
SILENCE	2 x 3.6	2 x 410	600
SILENCE	4 x 3.6	4 x 330	600
ASO	4 x 2.0	4 x 500	230
ASO	4 x 3.6	4 x 480	450
MONO	1 x 2.0	1 x 750	250
MONO	1 x 3.6	1 x 665	468
Power Typ	Number LHS 41L x power cons. kW	LHS 41L x Air flow l/min.	LHS 41L Temperature °C
ROBUST	2 x 2.0	2 x 510	310
ROBUST	4 x 2.0	4 x 270	470
ROBUST	1 x 4.4	1 x 810	390
ROBUST	2 x 4.4	2 x 450	560
SILENCE	2 x 2.0	2 x 453	320
SILENCE	4 x 2.0	4 x 368	330
SILENCE	1 x 4.4	1 x 410	620
SILENCE	2 x 4.4	2 x 400	620
SILENCE	4 x 4.4	4 x 330	630
ASO	4 x 2.0	4 x 500	270

Air flow and temperature values may deviate from those above based on the design of the entire hot-air system (including nozzles, air hoses, environmental conditions).

LHS air heaters in a production line
for drying insulating material.

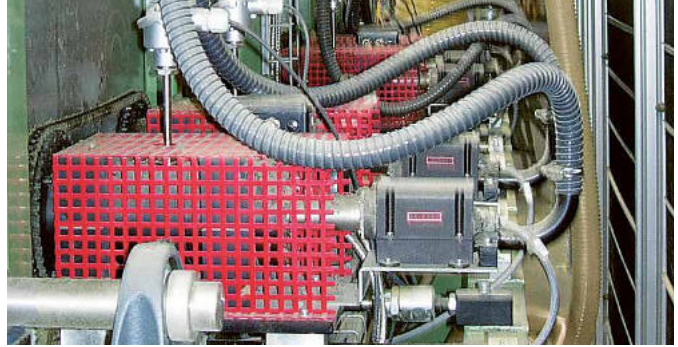

Air heater

LHS 41 CLASSIC



Heating power not adjustable

Detection of heating element and device
overheating with alarm output

Air heater

LHS 41 PREMIUM



Heating power steplessly adjustable
with potentiometer

Protection against heating element and
device overheating with alarm output

Air heater

LHS 41 System



Heating power or temperature steplessly
adjustable with potentiometer or remote
control interface


Protection against heating element and
device overheating with alarm output

Remote control interface for external
temperature controllers (Leister CSS, or
PLCs)

Air Heaters
Controllers

Order No.:		CLASSIC	PREMIUM	SYSTEM
LHS 41S	2.0 kW / 120V	143.292	143.289	143.279
LHS 41S	2.0 kW / 230V	143.291	143.287	143.278
LHS 41S	3.6 kW / 230V	143.290	143.283	142.489
LHS 41L	4.4 kW / 230V	145.726	145.435	145.729
LHS 41L	2.0 kW / 400V	143.293	143.281	142.492
LHS 41L	4.4 kW / 400V	143.294	143.282	143.280
LHS 41L	5.5 kW / 400V	145.727	145.438	145.728

Contact a Leister sales partner in your region for professional advice and
information on our other air heaters and blowers.

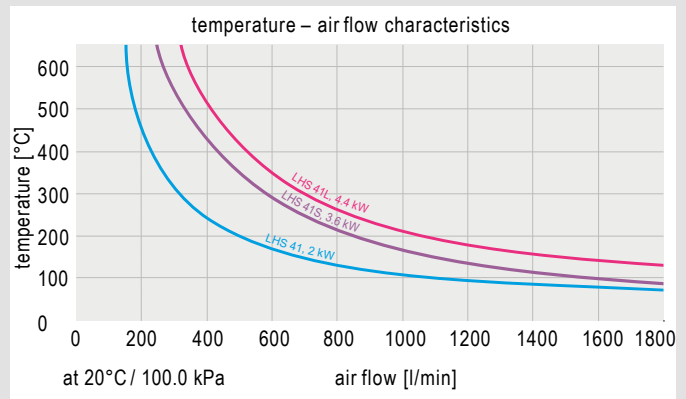

Accessories



LHS 61: The large powerful models.


The LHS 61 series is your choice for high performance applications. The outlet diameter of 62 mm for LHS 61S versions and 92 mm for LHS 61L versions allow high air flows with up to 16 kW heating power.

Air heater

LHS 61



Installation dimensions in mm

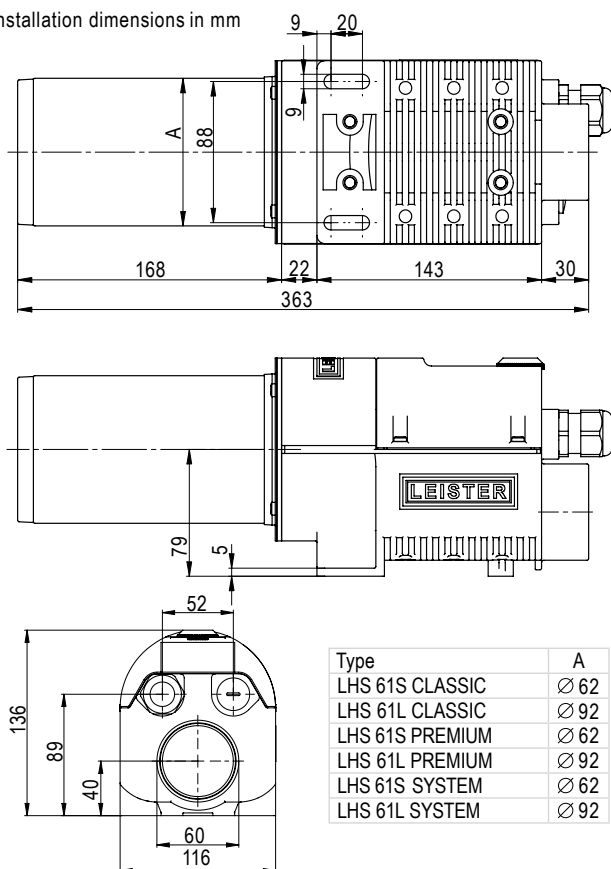

Combination possibilities

- Leister air heater at maximum heat power and without nozzle with Leister blower at 50 Hz, 1.5 m hose length and unimpeded air outflow.
- Hot-air temperature 3 mm after air outlet, measured at the hottest point.
- Air flow at 20°C, 100.0 kPa compliant with ISO6358.

Power Typ	Number LHS 61S x power cons. kW	LHS 61S x Air flow l/min.	LHS 61S Temperature °C
ROBUST	2 x 4.0	2 x 500	490
ROBUST	1 x 6.0	1 x 910	410
SILENCE	2 x 4.0	2 x 620	380
SILENCE	1 x 6.0	1 x 690	500
SILENCE	2 x 4.0	2 x 620	380
SILENCE	2 x 6.0	2 x 590	510
ASO	2 x 4.0	2 x 830	310
ASO	2 x 6.0	2 x 743	430
ASO	4 x 6.0	4 x 667	470
AIRPACK	1 x 4.0	1 x 3080	120
AIRPACK	2 x 4.0	2 x 1730	170
AIRPACK	4 x 4.0	4 x 960	280
AIRPACK	1 x 6.0	1 x 2950	160
AIRPACK	2 x 6.0	2 x 1700	240
AIRPACK	4 x 6.0	4 x 970	390
Power Typ	Number LHS 61L x power cons. kW	LHS 61L x Air flow l/min.	LHS 61L Temperature °C
ROBUST	1 x 8.0	1 x 1038	500
SILENCE	2 x 8.0	2 x 1029	440
SILENCE	1 x 11.0	1 x 1220	480
SILENCE	2 x 11.0	2 x 980	560
AIRPACK	1 x 8.0	1 x 3433	190
AIRPACK	2 x 8.0	2 x 2313	310
AIRPACK	4 x 8.0	4 x 979	510
AIRPACK	1 x 11.0	1 x 3380	230
AIRPACK	2 x 11.0	2 x 1840	380
AIRPACK	4 x 11.0	4 x 1010	590
AIRPACK	1 x 16.0	1 x 3450	360
AIRPACK	2 x 16.0	2 x 1930	550
ASO	1 x 11.0	1 x 1600	390
ASO	2 x 11.0	2 x 1480	420
ASO	4 x 11.0	4 x 1160	520
ASO	1 x 16.0	1 x 1500	610

Air flow and temperature values may deviate from those above based on the design of the entire hot-air system (including nozzles, air hoses, environmental conditions).

Three LHS 61S air heaters with wide slot nozzles in a wrapping line.



Air heater

LHS 61 CLASSIC



Heating power not adjustable

Detection of heating element and device overheating with alarm output

Air heater

LHS 61 PREMIUM



Heating power steplessly adjustable with potentiometer

Protection against heating element and device overheating with alarm output

Air heater

LHS 61 SYSTEM



Heating power or temperature steplessly adjustable with potentiometer or remote control interface

Protection against heating element and device overheating with alarm output

Remote control interface for external temperature controllers (Leister CSS, or PLCs)

Technical data

LHS 61S / 61L

Max. air outlet temperature	°C	650
Max. air inlet temperature	°C	65
Max. ambient temperature	°C	65
Min. air flow		As per diagram
Max. inlet pressure	kPa	100
Weight 61S / 61L	kg	3.15 / 3.65

Conformity mark




Approval mark



Protection class I




Minimum quantity of air at air inlet temperature of 20°C at 100% heating power

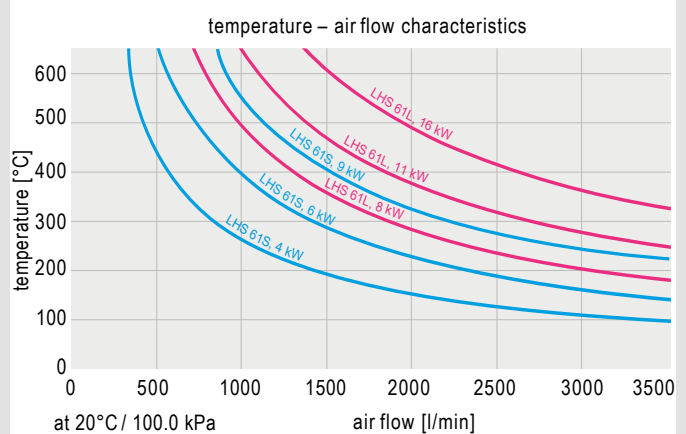

61S								
Voltage	V ~	3 × 230			1 × 400	3 × 400		
Power	kW	4	6	8	8.5	4	6	9
CLASSIC	Order no.	143.707	143.696	142.839	145.732	143.708	143.490	143.697
PREMIUM	Order no.	143.714	143.484		145.442	143.715	143.481	143.716
SYSTEM	Order no.	143.726	143.727		145.734	143.728	142.496	143.729
Voltage	V ~	1 × 480			3 × 480			
Power	kW	8	4	6				
CLASSIC	Order no.	145.730	143.709	143.698				
PREMIUM	Order no.	145.439	143.717	143.483				
SYSTEM	Order no.	145.733	143.730	143.731				

61L								
Voltage	V ~	3 × 230		3 × 400		3 × 480		
Power	kW	8	10	5	8	8		
CLASSIC	Order no.	143.710	143.489	143.711	143.712	143.713		
PREMIUM	Order no.	143.718	143.719	143.720	143.721	143.723		
SYSTEM	Order no.	143.732	143.733	143.734	143.735	143.736		
Voltage	V ~					3 × 400		3 × 480
Power	kW					11	16	11 16
CLASSIC	Order no.					143.699	143.488	143.700 143.487
PREMIUM	Order no.					143.722	143.485	143.724 143.486
SYSTEM	Order no.					142.568	143.478	143.737 143.479

Accessories



LHS 91: The intelligent power giant.


With power of up to 40 kW, the LHS 91 is the tool for even the most demanding of heating applications. With this performance it is even capable of replacing many gas-fired heaters.

Air heater

LHS 91



Technical data		BASIC	SYSTEM
LHS 91S			
Max. air outlet temperature	°C	650	650
Min. air flow acc. as per diagram			
Max. air inlet temperature	°C	100	50
Max. ambient temperature	°C	60	60
Weight	kg	13.5	13.5
Mark of conformity		CE	CE
Protection class I		⏏	⏏
Minimum quantity of air at air inlet temperature of 20°C at 100% heating power			

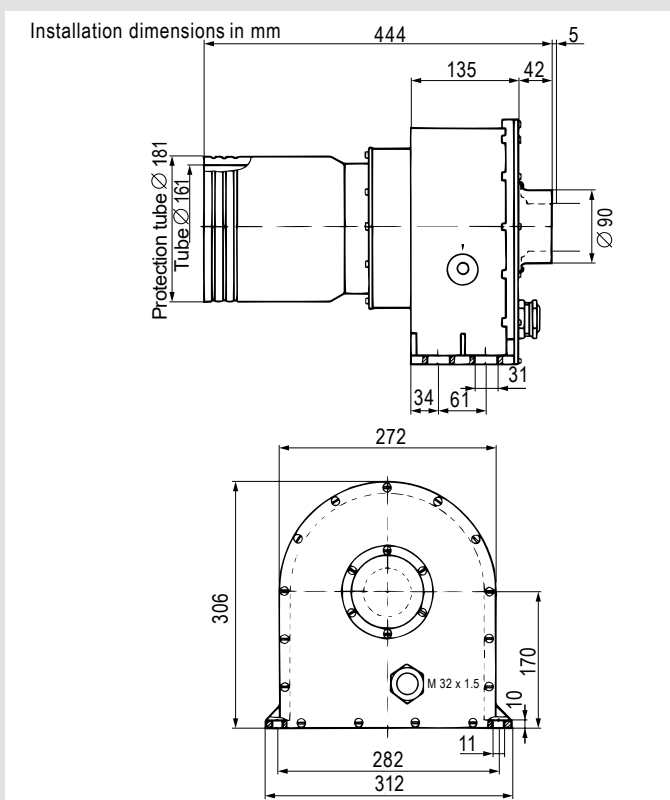

Tension	V ~	3 × 400		3 × 480	3 × 480
Power cons.	kW	11	32	32	40
BASIC	Order no.		100.764	100.766	139.206
SYSTEM	Order no.	140.358	140.356	146.862	145.685
Ø 90 mm air inlet nozzle as standard					

Combination possibilities

- Leister air heater at maximum heat power and without nozzle with Leister blower at 50 Hz, 3 m hose length and unimpeded air outflow.
- Hot-air temperature 3 mm after air outlet, measured at the hottest point.
- Air flow at 20°C, 100.0 kPa compliant with ISO 6358.

Power Typ	Number LE x power cons. kW	Air flow l/min.	Temperature °C
ASO	2 × 32	2 × 4200	500
AIRPACK	1 × 32	1 × 3300	540

Air flow and temperature values may deviate from those above based on the design of the entire hot-air system (including nozzles, air hoses, environmental conditions).

Two air heaters and two blowers used to dry impregnated Eternit piping. Two wide slot nozzles ensure the air is evenly distributed.



Air heater

LHS 91 BASIC



Heating power not adjustable

Air heater

LHS 91 SYSTEM




Heating power or temperature steplessly adjustable with potentiometer or remote control interface

Protection against heating element and device overheating with alarm output

Remote control interface for external temperature controllers (Leister CSS, or PLCs)

Air Heaters
Controllers

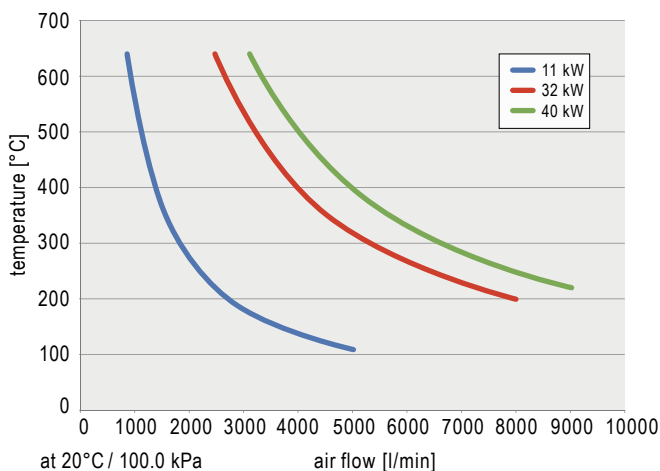


Accessories

43



New LHS 210/410

Leister Air Heaters
LHS 210/410

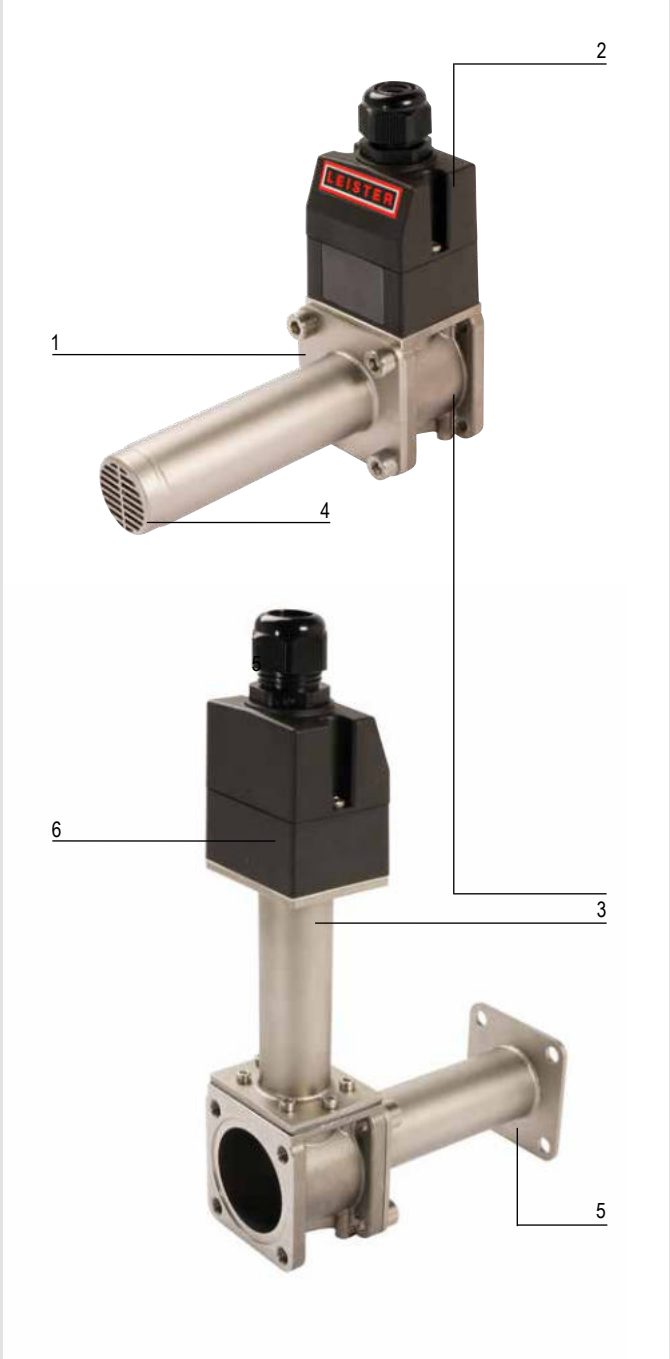

1



Compact:
Small dimensions for installation in tight spaces.

2



Connection:
Connecting the power supply is also very easy thanks to the well thought-out design.

3



Various versions:
SF = Single Flange
SF-R = Single Flange for Recirculation
DF = Double Flange
DF-R = Double Flange for Recirculation

4



Compatible with various nozzles:
The LHS SF is compatible with numerous nozzles from Leister, which enables countless application possibilities.

5



Double flange for piping installations:
Thanks to its flanges on both sides, the Leister LHS DF / DF-R tubular air heater is easy to install in piping systems and is suitable for a wide range of industrial processes and applications.

6







LHS SF-R / DF-R air heater for recirculation:
The housing connection is located outside the air flow. In addition, the housing connection is protected against overheating, making it possible to work with air inlet temperatures up to 350°C.

LHS 210

The LHS 210 is a small air heater from the Leister. Due to its particularly compact design, it can be easily integrated into industrial plants with limited space.




The housing connection on the LHS 210 is located outside the air flow, allowing the air to flow through the air heater unhindered and with hardly any loss in pressure. In addition, the housing connection of the LHS 210 SF-R and DF-R is protected against overheating, making it possible to work with air inlet temperatures up to 350°C.

Technical Data		LHS 210 SF	LHS 210 SF-R	LHS 210 DF	LHS 210 DF-R
Frequency	Hz	50 / 60	50 / 60	50 / 60	50 / 60
Nozzle connection \varnothing	mm	36.5	36.5		
Max. air outlet temperature	°C	650	650	650	650
Max. air inlet temperature	°C	100	350	100	350
Max. ambient temperature	°C	65	65	65	65
Max. supply air pressure	kPa	100	100	100	100
Weight	kg	1.19	1.51	1.25	1.57
Mark of conformity		CE   			
Protection class I					




Installation
dimensions in mm

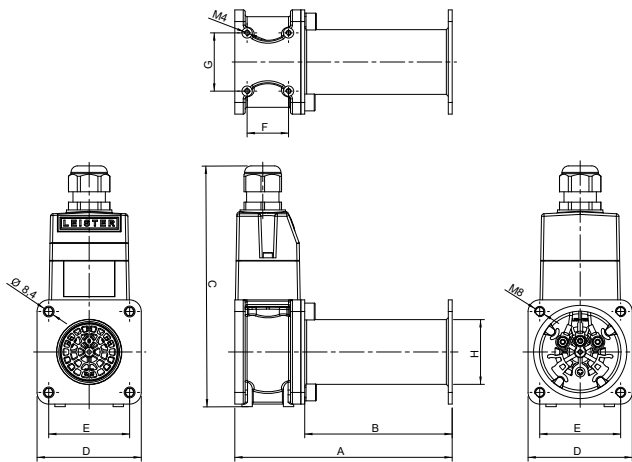

Typ	A	B	C	D	E	F	G	H
LHS 210 SF	178	124	175	67	50.8	32	34	36.5
LHS 210 DF	168	114	175	67	50.8	32	34	36.5

Installation
dimensions in mm

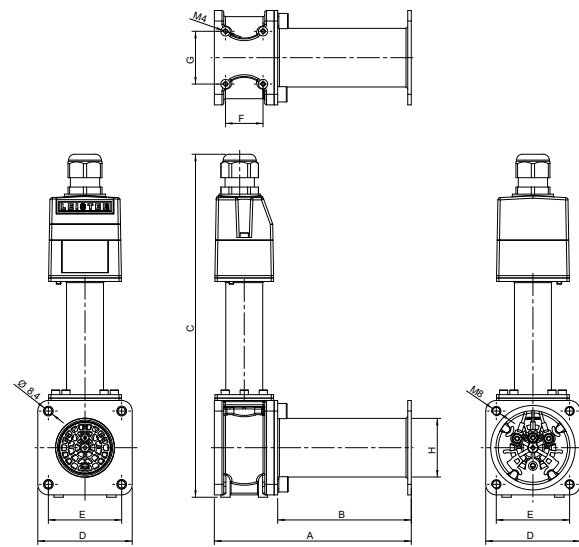

Typ	A	B	C	D	E	F	G	H
LHS 210 SF-R	178	124	282	67	50.8	32	34	36.5
LHS 210 DF-R	168	114	282	67	50.8	32	34	36.5

Order no.:






LHS 210 SF, 120 V / 2 kW	170.898	LHS 210 SF-R, 120 V / 2 kW	170.909
LHS 210 SF, 230 V / 1 kW	170.899	LHS 210 SF-R, 230 V / 1 kW	170.910
LHS 210 SF, 230 V / 2 kW	170.900	LHS 210 SF-R, 230 V / 2 kW	170.911
LHS 210 SF, 230 V / 3.3 kW	170.901	LHS 210 SF-R, 230 V / 3.3 kW	170.912
LHS 210 DF, 120 V / 2 kW	170.920	LHS 210 DF-R, 120 V / 2 kW	170.931
LHS 210 DF, 230 V / 1 kW	170.921	LHS 210 DF-R, 230 V / 1 kW	170.932
LHS 210 DF, 230 V / 2 kW	170.922	LHS 210 DF-R, 230 V / 2 kW	170.933
LHS 210 DF, 230 V / 3.3 kW	170.923	LHS 210 DF-R, 230 V / 3.3 kW	170.934

LHS 410

The LHS 410 is a compact air heater from Leister. It offers an even higher air volume than the LHS 210. Thanks to its small design, it can be easily integrated into various industrial processes with limited space. Connecting the power supply is also very easy due to the well thought-out design.




The housing connection on the LHS 410 is located outside the air flow, allowing the air to flow through the air heater unhindered and with hardly any loss in pressure. In addition, the housing connection of the LHS 410 SF-R and DF-R is protected against overheating, making it possible to work with air inlet temperatures up to 350°C.

Technical Data		LHS 410 SF	LHS 410 SF-R	LHS 410 DF	LHS 410 DF-R
Frequency	Hz	50 / 60	50 / 60	50 / 60	50 / 60
Nozzle connection \varnothing	mm	50	50		
Max. air outlet temperature	°C	650	650	650	650
Max. air inlet temperature	°C	100	350	100	350
Max. ambient temperature	°C	65	65	65	65
Max. supply air pressure	kPa	100	100	100	100
Weight	kg	1.55	1.89	1.65	1.99
Mark of conformity		CE    			
Protection class I					




Installation
dimensions in mm

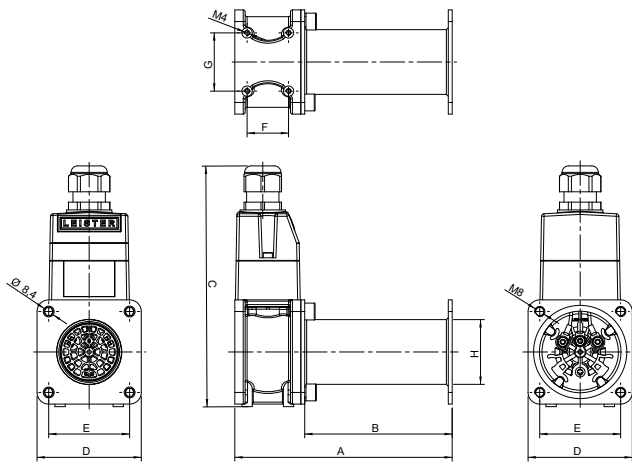

Typ	A	B	C	D	E	F	G	H
LHS 410 SF	178	124	186	81	62.5	32	45	50
LHS 410 DF	168	114	186	81	62.5	32	45	50

Installation
dimensions in mm

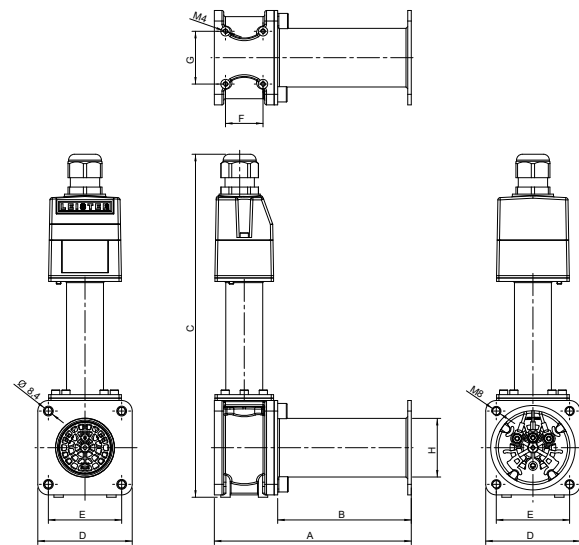

Typ	A	B	C	D	E	F	G	H
LHS 410 SF-R	178	124	293	81	62.5	32	45	50
LHS 410 DF-R	168	114	293	81	62.5	32	45	50

Order no.:

LHS 410 SF, 120 V / 2 kW	170.902	LHS 410 SF-R, 120 V / 2 kW	170.913
LHS 410 SF, 230 V / 2 kW	170.903	LHS 410 SF-R, 230 V / 2 kW	170.914
LHS 410 SF, 230 V / 3.6 kW	170.904	LHS 410 SF-R, 230 V / 3.6 kW	170.915
LHS 410 SF, 230 V / 4.4 kW	170.905	LHS 410 SF-R, 230 V / 4.4 kW	170.916
LHS 410 SF, 400 V / 2 kW	170.906	LHS 410 SF-R, 400 V / 2 kW	170.917
LHS 410 SF, 400 V / 4.4 kW	170.907	LHS 410 SF-R, 400 V / 4.4 kW	170.918
LHS 410 SF, 400 V / 5.5 kW	170.908	LHS 410 SF-R, 400 V / 5.5 kW	170.919
LHS 410 DF, 120 V / 2 kW	170.924	LHS 410 DF-R, 120 V / 2 kW	170.935
LHS 410 DF, 230 V / 2 kW	170.925	LHS 410 DF-R, 230 V / 2 kW	170.936
LHS 410 DF, 230 V / 3.6 kW	170.926	LHS 410 DF-R, 230 V / 3.6 kW	170.937
LHS 410 DF, 230 V / 4.4 kW	170.927	LHS 410 DF-R, 230 V / 4.4 kW	170.938
LHS 410 DF, 400 V / 2 kW	170.928	LHS 410 DF-R, 400 V / 2 kW	170.939
LHS 410 DF, 400 V / 4.4 kW	170.929	LHS 410 DF-R, 400 V / 4.4 kW	170.940
LHS 410 DF, 400 V / 5.5 kW	170.930	LHS 410 DF-R, 400 V / 5.5 kW	170.941

High temperature air heater: Our hottest models.

The high temperature air heaters are suitable for temperatures up to 900 °C. The devices have no integrated power electronics.


High temperature air heater

LE 5000 HT (up to 900 °C)



Technical data		
High temperature LE 5000 HT		
No integrated power electronics		•
Heating element tube with protective tube		•
Max. air outlet temperature	°C	900
Min. air flow	NI/min	580
Max. air inlet temperature	°C	100
Max. ambient temperature	°C	100
Weight	kg	2.25
Mark of conformity		CE
Protection class I		⊕
Minimum quantity of air at air inlet temperature of 20°C at 100% heating power NI = Standard litres according to ISO6358		

Installation dimensions in mm

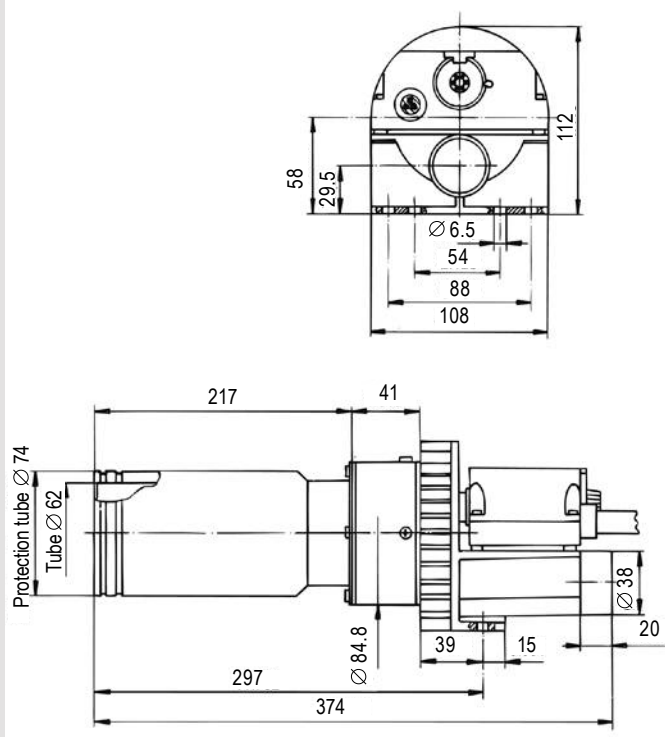

Optional temperature regulation		
With CSS (CSSEASY) and Solid state relay (p 58 – 59)		


Voltage	V ~	3 × 400
Power consumption	kW	11
Order no.		108.717

Combination possibilities			
- Leister air heater at maximum heat power and without nozzle with Leister blower at 50 Hz, 1.5 m hose length and unimpeded air outflow.			
- Hot-air temperature 3 mm after air outlet, measured at the hottest point.			
- Air flow at 20 °C, 100.0 kPa compliant with ISO6358.			

Power-Type	Number LE x Power cons. kW	Air flow l/min.	Temperature °C
ROBUST	1 × 11	1 × 800	800
AIRPACK	1 × 11	1 × 2800	360
AIRPACK	2 × 11	2 × 1500	550

Air flow and temperature values may deviate from those above based on the design of the entire hot-air system (including nozzles, air hoses, environmental conditions).

Two LE 10 000 HT air heaters and
an ASO blower in combination
with a shrink tunnel.

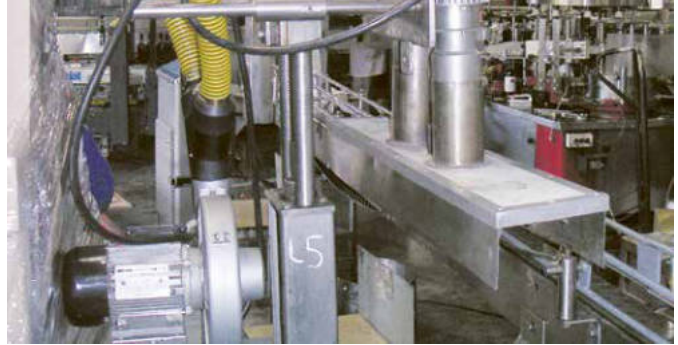

High temperature air heater

LE 10000 HT (up to 900 °C)



Technical data

High temperature LE 10000 HT

No integrated power electronics		•
Heating element tube with protective tube		•
Max. air outlet temperature	°C	900
Min. air flow	l/min	800
Max. air inlet temperature	°C	100
Max. ambient temperature	°C	100
Weight	kg	4.0

Mark of conformity




Protection class I



Minimum quantity of air at air inlet temperature of 20°C at 100% heating power
NI = Standard litres according to ISO 6358

Installation dimensions in mm

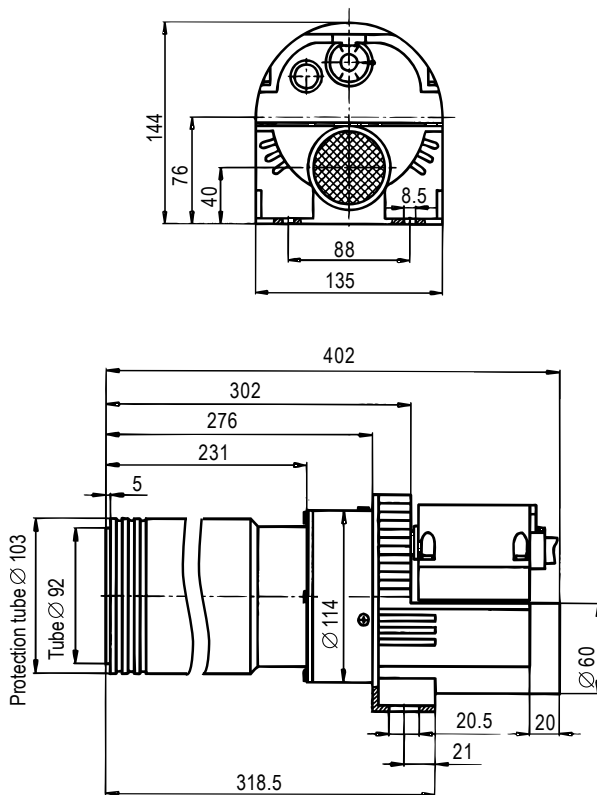

Optional temperature regulation

With CSS (CSSEASY) and Solid state relay (p 58 – 59)

Voltage	V~	3 × 400	3 × 480
Power consumption	kW	15	15
Order no.		110.568	113.349

Combination possibilities

- Leister air heater at maximum heat power and without nozzle with Leister blower at 50 Hz, 1.5 m hose length and unimpeded air outflow.
- Hot-air temperature 3 mm after air outlet, measured at the hottest point.
- Air flow at 20 °C, 100.0 kPa compliant with ISO 6358.

Power-Type	Number LE x Power cons. kW	Air flow l/min.	Temperature °C
ROBUST	1 × 15	1 × 1100	850
ASO	1 × 15	1 × 2200	690
ASO	2 × 15	2 × 2100	700
AIRPACK	1 × 15	1 × 3400	340
AIRPACK	2 × 15	2 × 1650	620

Air flow and temperature values may deviate from those above based on the design of the entire hot-air system (including nozzles, air hoses, environmental conditions).

Accessories



LE MINI: The precise and accurate minis.

The world's smallest air heater with an integrated temperature probe. Especially suited for applications in which heat is concentrated to a point. It is simple to incorporate into the tightest spaces. LE MINI operates with compressed air at a pressure of 200 kPa. Model versions are available with or without an integrated sensor. The SENSOR KIT add-on box offers a plug'n play solution with its integrated power electronics and temperature regulator.

Air heater

LE MINI



Air heater

LE MINI SENSOR




Air heater


LE MINI SENSOR KIT



Technical data			LE MINI	LE MINI SENSOR	LE MINI SENSOR KIT
Temperature regulator integrated into the connection box					•
Integrated temperature probe				•	•
Thermoswitch for device protection			•	•	•
Heating element protection				•	•
Analogue output (passive) 4 – 20 mA				•	
Pressure reduction valve					•
Max. air outlet temperature	°C	400 W	600	600	600
		800 W	750	750	750
Min. air flow	l/min.	400 W	25	10	10
		800 W	30	10	10
Max. air inlet temperature	°C		60	60	60
Max. ambient temperature	°C		60	60	60
Max. supply air pressure	kPa		200	200	200
Weight LE MINI	kg	400 W	0.12	0.12	0.12
		800 W	0.15	0.15	0.15
Weight Converter	kg			0.19	
Weight Terminal box	kg				2.15
Mark of conformity			CE	CE	CE
Protection class II			□	□	□

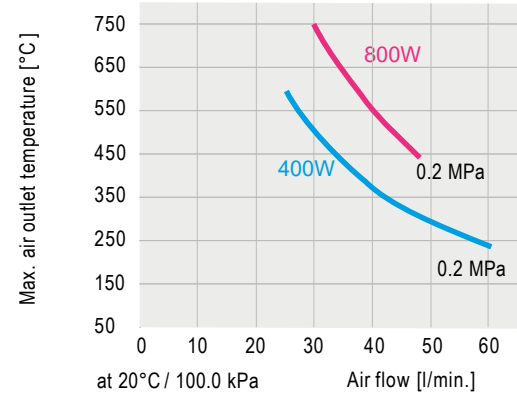

Voltage	V~	120	230	230
Power consumption	W	400	400	800
Approval mark		⑤	⑤	⑤
LE MINI	Order no.	115.683	115.682	115.369
LE MINI SENSOR	Order no.	117.371	117.370	117.369
LE MINI SENSORKIT	Order no.	128.536		125.416

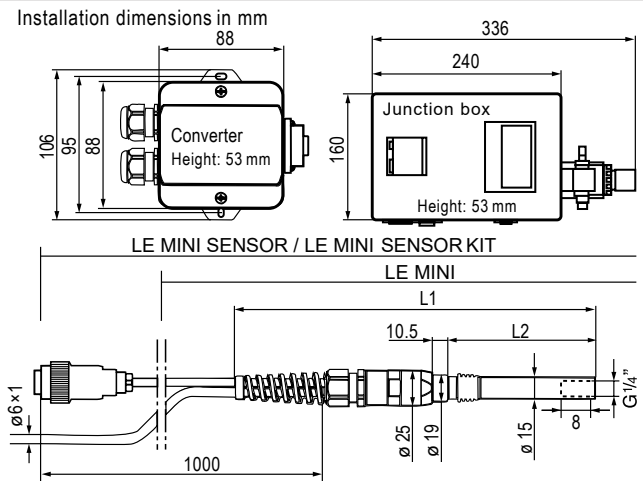


LE MINI: Cable and hose lengths: 3 m
LE MINI SENSOR: Hose length: 3 m

	L1	L2
Type 400	253	104
Type 800	308	159

Accessories LE MINI (Ø 21.3 mm)

	107.282	Flange connector, push-fit a = 40 mm
	117.955	Nozzle adapter, screw-fit for nozzles Ø 21.3 mm
	105.624 107.145	Round nozzle, push-fit Ø 5 mm, 45 mm straight Ø 10 mm, 45 mm straight
	107.152	Round nozzle, push-fit Ø 12 mm with screw terminal
	107.310 107.311	Sieve reflector, push-fit (a x b) 20 x 35 mm 50 x 35 mm
	105.549 105.559 105.548 105.547	Wide slot nozzle, push-fit (a x b) 10 x 2 mm, angled 20 x 2 mm, length 55 mm 40 x 5 mm 50 x 8 mm
	129.407 113.806	cable prolongation 2 m, with plug and connection cable prolongation 5 m, with plug and connection > LE MINI SENSOR > LE MINI SENSORKIT


Air heater and blower for drying labels. Fast drying allows for high throughput speeds.

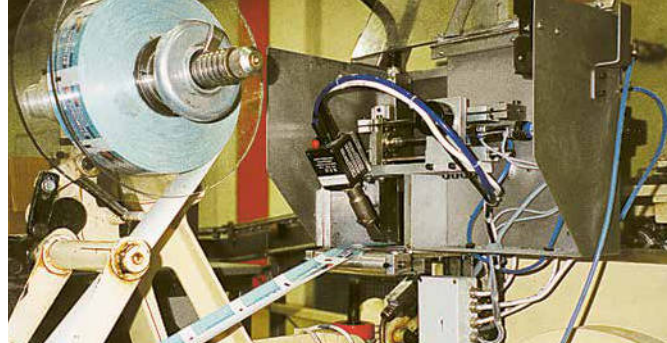

Accessories LHS 15 (Ø 21.3 mm)

	107.282	Flange connector, push-fit a = 40 mm
	105.624 107.145	Round nozzle, push-fit Ø 5 mm, 45 mm straight Ø 10 mm, 45 mm straight
	107.152	Round nozzle, push-fit Ø 12 mm with screw terminal
	107.310 107.311	Sieve reflector, push-fit (a x b) 20 x 35 mm 35 x 50 mm
	105.549 105.559 105.548 105.547	Wide slot nozzle, push-fit (a x b) 10 x 2 mm, angled 20 x 2 mm, length 55 mm 40 x 5 mm 50 x 8 mm
	144.035	Compressed air connection
	143.533	Adapter plate LHS 15 instead LE 700
	149.941	Round nozzle (Ø 21.3)
	150.097	Air inlet reduction valve
	150.192	Heater tube (Ø 21.3) with protection tube

Accessories LHS 21 (Ø 36.5 mm)

	125.316	Flange connector, push-fit a = 62 mm
	107.251	Extension nozzle, push-fit (a x b) 210 x 36.5 mm
	107.003 107.002	Round nozzle, push-fit Ø 12 mm Ø 12 mm with screw terminal
	107.261 108.078 105.982	Wide slot nozzle, push-fit (a x b) 70 x 4 mm 100 x 4 mm 150 x 4 mm
	107.308 107.309	Sieve reflector, push-fit (a x b) 35 x 50 mm 20 x 35 mm
	107.314	Spoon reflector, push-fit (a x b) 25 x 30 mm
	107.319	Sieve reflector «Douche», push-fit Ø 65 mm
	106.132	Shell reflector, push-fit (a x b x c) 150 x 26 x 44 mm
	133.515	Thermocouple holder
	144.037	Compressed air connection
	142.230 143.480	Adapter plate LHS 21 instead LHS 20 LHS 21 instead LE 3000
	150.194	Heater tube (Ø 36.5) with protection tube for LHS 21L
	150.193	Heater tube (Ø 36.5) with protection tube for LHS 21S
	149.942	Round nozzle (Ø 36.5)
	150.098	Air inlet reduction valve

Drying pills, mints and
sweets and smoothing
their coatings.



Accessories LHS 41 (Ø 50 mm)

	107.254	Flange connector, push-fit a = 70 mm
	122.332 122.924	Nozzle adapter, push-fit (a × b) from (a) Ø 50 mm to (b) Ø 62 mm from (a) Ø 50 mm to (b) Ø 37 mm
	107.255	Extension nozzle, push-fit (a × b) 160 × 36.5 mm
	105.950 107.257 105.955 105.952	Tubular nozzle, push-fit (a × b × c) 460 × 300 × 2 mm 590 × 420 × 1.7 mm 836 × 660 × 1 mm 900 × 800 × 0.9 mm
	107.256	Angled nozzle, push-fit (a × b) shank length 106 × 162, Ø 50 mm
	105.961 107.258	Wide slot nozzle, push-fit (a × b) 45 × 12 mm, length 350 mm 70 × 10 mm
	106.057 106.060 107.270 106.061	Wide slot nozzle, push-fit (a × b) 100 × 4 mm 150 × 6 mm 150 × 12 mm 300 × 6 mm
	107.331	Hinged reflector, push-fit (d × b) 70 × 70 mm
	107.340	Shell reflector, push-fit (a × b × c) 45 × 250 × 71 mm
	107.327 107.333	Sieve reflector, push-fit (a × b) 70 × 75 mm 110 × 150 mm
	107.330	Hinged reflector, push-fit (d × b) 125 × 22 mm
	106.127	Sieve reflector "Douche", push-fit Ø 65 mm

	133.516	Thermocouple holder
	144.038	Compressed air connection
	142.232 143.436	Adapter plate LHS 41 instead LHS 40 Adapter plate LHS 41 instead LE 3300
	149.943	Round nozzle (Ø 50)
	150.096	Air inlet reduction valve
	150.195	Heater tube (Ø 50) with protection tube for LHS 41S
	150.196	Heater tube (Ø 50) with protection tube for LHS 41L

Accessories

LHS 61S & LE 5000 HT (Ø 62 mm)

	125.317	Flange connector, push-fit a = 90 mm
	113.351	Extension tube, push-fit (a × b) 275 × Ø 62 mm
	107.247	Extension nozzle, push-fit (a × b) 200 × 45 mm
	105.907 105.919 107.253 114.136 105.906	Tubular nozzle, push-fit (a × b × c) 354 × 204 × 4.5 mm 456 × 306 × 3 mm 700 × 550 × 1.7 mm 795 × 655 × 1.5 mm 1100 × 1000 × 4 mm
	127.062	Nozzle adapter Ø 62 mm, Ø 60 mm, length 110 mm, to connect with blow- off nozzle
	107.265	Angled nozzle, push-fit (a × b) shank length 120 × 115, Ø 62 mm
	107.245	Round nozzle, push-fit d = 40 mm
	107.342 106.174 106.175	Shell reflector, push-fit 50 × 400 × 80 mm 65 × 400 × 95 mm 80 × 400 × 80 mm (a × b × c)
	107.260 107.259 105.977 107.263 107.262 105.992 105.991	Wide slot nozzle, push-fit (a × b) 85 × 15 mm 150 × 12 mm 200 × 9 mm 250 × 12 mm, with sieve insert 300 × 4 mm 400 × 4 mm 500 × 4 mm
	106.143 107.329 107.336	Sieve reflector, push-fit (a × b) 45 × 75 mm 70 × 75 mm 110 × 152 mm
	149.624	Protection tube adapter for LHS 61S

Accessories

LHS 61S & LE 5000 HT (Ø 62 mm)

	107.335	Sieve reflector "Douche", push-fit Ø 150 mm
	133.517 *	Thermocouple holder
	144.039 *	Compressed air connection
	143.575 *	Adapter plate LHS 61S instead LE 5000

* = Only for LHS 61S

Utilizing precisely controlled hot-air
to shrink PE sleeves on cans.




Accessories

LHS 61L & LE 10000 HT (Ø 92 mm)

	125.318	Flange connector, push-fit a = 120 mm
	107.244	Round nozzle, push-fit d = 50 mm
	107.273	Extension nozzle, push-fit (a × b) 500 × 60 mm
	107.269	Angled nozzle, push-fit (a × b) shank length 175 × 175 mm
	106.031 106.035 107.268 106.033	Tubular nozzle, push-fit (a × b × c) 1000 × 800 × 2 mm 1185 × 900 × 1.6 mm 1288 × 1000 × 1.5 mm 1550 × 1350 × 1.1 mm
	107.274 106.028 107.272 106.018 106.024 107.267 106.023 106.026	Wide slot nozzle, push-fit (a × b) 130 × 17 mm 220 × 12 mm 300 × 12 mm 400 × 10 mm 500 × 7 mm 500 × 15 mm 600 × 4 mm 600 × 9 mm
	107.341	Shell reflector, push-fit (a × b × c) 160 × 370 × 210 outside/158 inside
	107.276	Sieve reflector "Douche", push-fit Ø 260 mm
	133.517 *	Thermocouple holder
	144.039 *	Compressed air connection
	149.629	Protection tube adapter for LHS 61L

* = Only for LHS 61L

Accessories LHS 91 (Ø 161 mm)



	125.319	Flange connector, push-fit a = 192 mm
	107.230	Round nozzle, push-fit d = 100 mm
	107.233	Extension nozzle, push-fit (a × b) 400 × 100 mm
	107.235 107.234 105.856 105.859	Wide slot nozzle, push-fit (a × b) 500 × 15 mm 1200 × 10 mm 1600 × 8 mm 2000 × 10 mm



	125.316	Flange connector, push-fit a = 62 mm
	107.251	Extension nozzle, push-fit (a x b) 210 x 36.5 mm
	107.003 107.002	Round nozzle, push-fit Ø 12 mm Ø 12 mm with screw terminal
	107.261 108.078 105.982	Wide slot nozzle, push-fit (a x b) 70 x 4 mm 100 x 4 mm 150 x 4 mm
	107.308 107.309	Sieve reflector, push-fit (a x b) 35 x 50 mm 20 x 35 mm
	107.314	Spoon reflector, push-fit (a x b) 25 x 30 mm
	107.319	Sieve reflector "Douche", push-fit Ø 65 mm
	106.132	Shell reflector, push-fit (a x b x c) 150 x 26 x 44 mm
	149.942	Round nozzle (Ø 36.5)
	106.956	Thermocouple with plug, 1 m cable
	106.958 106.960 106.962	Thermocouple extension cable with plug and connection 2 m 4 m 10 m
	123.039	CSS - Controller
	137.720	E5CC - Controller

	161.643	Inlet flange kit, Ø 38 mm
	161.646	Gasket housing
	161.832	Thermocouple with holder for LHS 210 SF
	161.854	Thermocouple with holder for LHS 210 DF
	161.856	Nozzle adapter to Ø 36.5 mm for LHS 210 DF

	107.254	Flange connector, push-fit a = 70 mm
	122.332 122.924	Nozzle adapter, push-fit (a × b) from (a) Ø 50 mm to (b) Ø 62 mm from (a) Ø 50 mm to (b) Ø 37 mm
	107.255	Extension nozzle, push-fit (a × b) 160 × 36.5 mm
	105.950 107.257 105.955 105.952	Tubular nozzle, push-fit (a × b × c) 460 × 300 × 2 mm 590 × 420 × 1.7 mm 836 × 660 × 1 mm 900 × 800 × 0.9 mm
	107.256	Angled nozzle, push-fit (a × b) shank length 106 × 162, Ø 50 mm
	105.961 107.258	Wide slot nozzle, push-fit (a × b) 45 × 12 mm, length 350 mm 70 × 10 mm
	106.057 106.060 107.270 106.061	Wide slot nozzle, push-fit (a × b) 100 × 4 mm 150 × 6 mm 150 × 12 mm 300 × 6 mm
	107.331	Hinged reflector, push-fit (d × b) 70 × 70 mm
	107.340	Shell reflector, push-fit (a × b × c) 45 × 250 × 71 mm
	107.327 107.333	Sieve reflector, push-fit (a × b) 70 × 75 mm 110 × 150 mm

	107.330	Hinged reflector, push-fit (d × b) 125 × 22 mm
	106.127	Sieve reflector "Douche", push-fit Ø 65 mm
	149.943	Round nozzle, Ø 50 mm
	106.956	Thermocouple with plug, 1 m cable
	106.958 106.960 106.962	Thermocouple extension cable with plug and connection 2 m 4 m 10 m
	123.039 137.720	CSS – Controller E5CC – Controller
	161.645 161.644	Inlet flange kit, Ø 38 mm Inlet flange kit, Ø 60 mm
	161.647	Gasket housing
	161.833	Thermocouple with holder for LHS 410 SF
	161.855	Thermocouple with holder for LHS 410 DF
	161.857	Nozzle adapter to Ø 50 mm for LHS 410 DF

Save Energy with Leister.


Large amounts of energy and with that, money, can be saved by recycling the hot air. Leister has customized solutions for combining air heaters and blowers which are suitable for recycling hot air thanks to a design made to withstand high-temperatures.

Hot Air Recycling Saves Energy and Costs

In order to heat a defined volume of air (air flow) to the desired temperature, a certain amount of energy needs to be present. The greater the difference in temperatures ΔT between the air inlet and the air outlet, the more energy that is needed. The ΔT is reduced by operating with hot air recirculation. That saves energy and costs.

To 'recycle' the hot air from the process, both the blower and the air heater have to withstand the high temperatures at the air inlet side. LEISTER's double-flange air heaters types LE5000 DF-R and LE10000 DF-R (page 46/47) and the RBRblower (page 54) provide the solution. Air with a temperature of up to 350°C can be moved, reheated and recirculated without a problem.

When accessories such as insulated hoses, high-temperature seals and various flanges are added, systems with air heaters and blowers become perfectly supplemented for recycling applications.

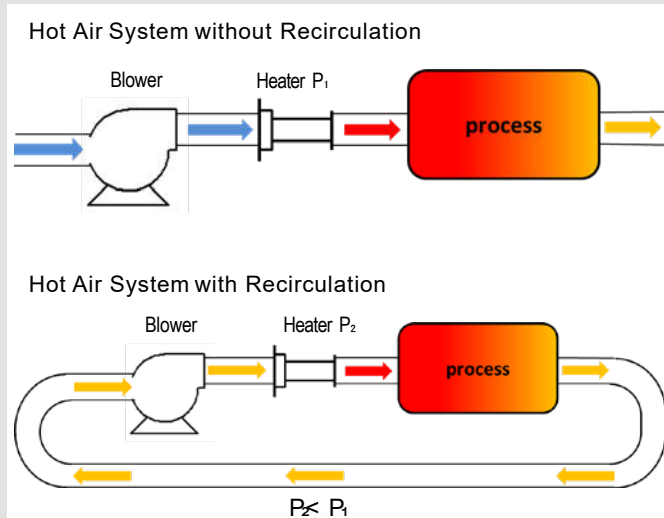

Sample calculation:

To heat 4000 l/min of air flow to a desired temperature of T₂ = 500°C, different outputs are required, depending on the air inlet temperature T₁.

T ₁ = 20°C	->	38.7 kW	
T ₁ = 160°C	->	27.4 kW	29.2 % compared with 20°C
T ₁ = 350°C	->	12.1 kW	68.7 % compared with 20°C 55.8 % compared with 160°C

These differences also match the potential savings in energy. The energy savings are 159 600 kWh per year when the recirculation mode is used and the inlet temperature is 350°C, instead of working with ambient air at 20°C (in 24-hour operation, for 250 working days).

Annual energy consumption at T₁ = 20°C > 232 200 kWh.

Annual energy consumption at T₁ = 350°C > 72 600 kWh,

Savings = 159 600 kWh

If the price of electricity (commercial, large consumers) is € 0.12 / kWh, the potential savings per year is € 19,152 just from using DF-Rtype double-flange air heaters. Based on a 24-hour operation, 250 days per year, T₁ = 350°C instead of 20°C and T₂ = 500°C and 4000 l / min air flow.




Hot air system for hot air recirculation.

LE 10 000 DF-C “Clean Air Heater”.

The Clean Air Heater is the next step in completing the double-flange product range. This air heater is suitable for industries with stringent requirements for “clean” environments such as: food and beverage, medical, pharmaceutical, cosmetics and electronics manufacturing. The LE 10 000 DF-C was developed using the newest standards for clean production defined by the European Hygienic Engineering & Design Group (EHEDG). The Clean Air Heater’s design minimizes particle emission and is exclusively manufactured using nontoxic materials.

Air heater

LE 10 000 DF-C

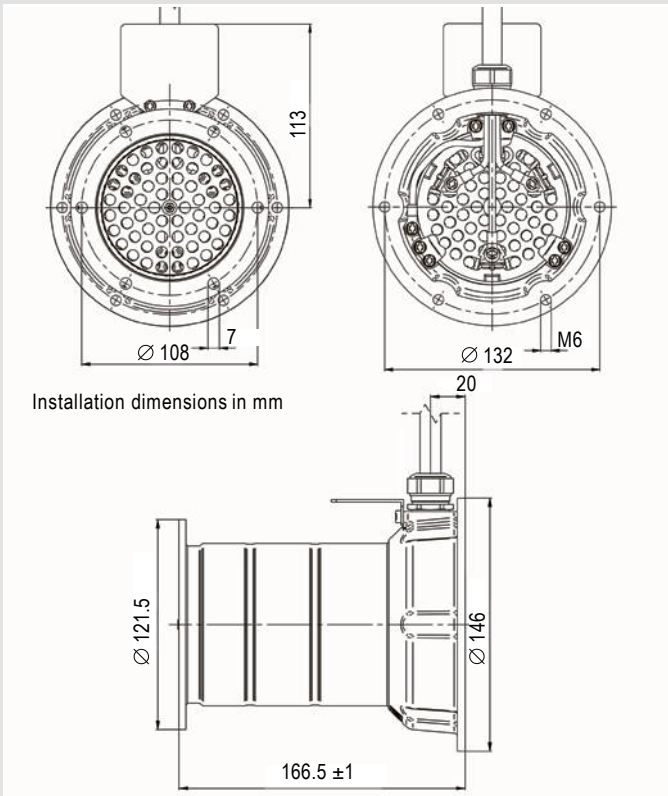

Technical data		
LE 10 000 DF-C		
Easy to integrate into existing air systems		•
Suitable for recycling air		•
Simple and safe fixture options		•
No integrated power electronics		•
Max. air outlet temperature	°C	650
Min. air flow	NI/min	4.5 kW 320
		5.5 kW 420
		8.0 kW 610
		10 kW 760
		11 kW 840
		17 kW 1300
Max. air inlet temperature	°C	150
Max. ambient temperature	°C	100
Weight including cable	kg	3.9

Conformity mark	CE c RU US
Protection class I	⊕

Minimum quantity of air at air inlet temperature of 20°C at 100% heating power
NI = Standard litres according to ISO 6358

Voltage	V ~	3 × 230	3 × 230	3 × 400	3 × 400	3 × 400
Power consumption	kW	8.0	10	5.5	11	17
LE 10 000 DF-C	Order no.	146.288	146.916	147.323	147.324	147.325
Voltage	V ~	3 × 480	3 × 480	3 × 480		
Power consumption	kW	4.5	8.0	10		
LE 10 000 DF-C	Order no.	153.783	154.088	154.276		

Additional versions available on request

LE 5000 DF / LE 10 000 DF product portfolio				
Product	Type	Power range	Max. inlet temperature	Max. outlet temperature
Standard	LE 5000 DF	4.5 – 7.5 kW	150° C	700° C
	LE10 000 DF	5.5 – 17 kW	150° C	650° C 900° C
Recirculation	LE5000 DF-R	4.5 – 8 kW	350° C	700° C
	LE10 000 DF-R	5.5 – 17 kW	350° C	650° C 900° C
Clean	LE10 000 DF-C	5.5 – 17 kW	150° C	650° C*


* Max. temperature for applications in food production according to material certification 400°C / 752 °F (ask Leister Customer Support team for details)

Air heater

LE 5000 DF-R / DF / DF HT



Installation dimensions in mm

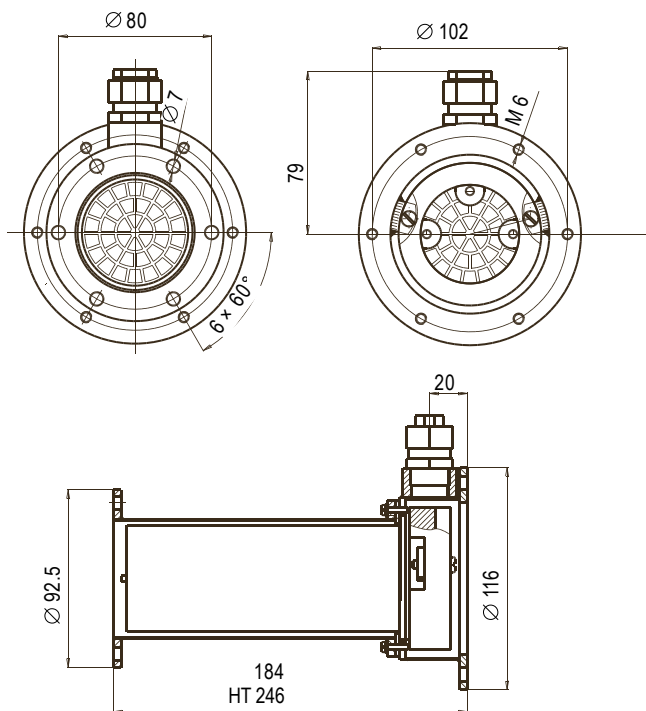

Technical data		LE 5000 DF-R	LE 5000 DF	LE 5000 DF-HT
LE 5 000 DF				
Easy to integrate into existing air systems		•	•	•
Suitable for recycling air		•	•	•
Simple and safe fixture options		•	•	•
No integrated power electronics		•	•	•
Max. air outlet temperature	°C	700	700	900
Min. air flow	NI/min 4.5 kW	320	320	
	6.5 kW	460	460	
	7.0 kW			380
	7.5 kW	530	530	400
	8.0 kW	550	550	
	11 kW			580
Max. air inlet temperature	°C	350	150	150
Max. ambient temperature	°C	200	100	100
Weight including cable	kg	2.0	2.6	3.1

Conformity mark	CE	CE	UL
Protection class I		⊕	

Minimum quantity of air at air inlet temperature of 20°C at 100% heating power
NI = Standard litres according to ISO 6358

Optional temperature regulation
With CSS (CSSEASY) and Solid state relay (p 58 – 59)

Voltage	V~	3 × 200	3 × 230	3 × 400	3 × 400	3 × 400	3 × 400
Power	kW	7.0	8.0	4.5	6.5	7.5	11
LE 5000 DF-R	Order no		146.793	146.480	146.794	146.795	
LE 5000 DF	Order no		116.067	117.551		114.240	
LE 5000 DF*	Order no			128.879	127.872		
LE 5000 DF HT	Order no	151.676				147.334	147.820

*sealed

Additional versions available on request

Energy efficient hot-air recycling
with LE 5000 DF-R air heater
on a shrinking tunnel.




Air heater

LE 10000 DF-R / DF / DF HT / DF-R HT



Installation dimensions in mm

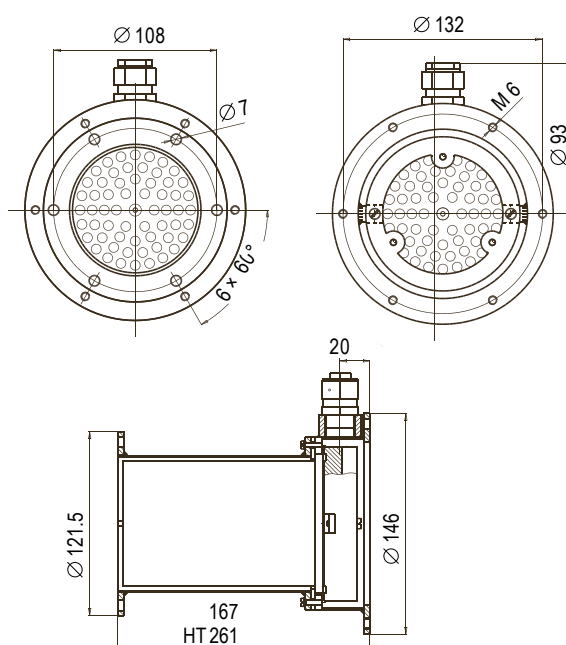

Technical data		LE 10 000 DF-R	LE 10 000 DF-R HT	LE 10 000 DF	LE 10 000 DF-HT
LE 10 000 DF					
Easy to integrate into existing air systems		•	•	•	•
Suitable for recycling air		•	•	•	•
Simple and safe fixture options		•	•	•	•
No integrated power electronics		•	•	•	•
Max. air outlet temperature	°C	650	900	650	900
Min. air flow	NI/min				
	5.5 kW	420		420	
	8.0 kW	610		610	
	11 kW	840		840	
	16 kW	1220		1220	
	17 kW	1300		1300	
	15 kW HT		800		800
Max. air inlet temperature	°C	350	350	150	150
Max. ambient temperature	°C	200	200	100	100
Weight including cable	kg	2.7	3.3	3.4	4.0

Conformity mark	CE	CE c	UL
Protection class I			

Minimum quantity of air at air inlet temperature of 20°C at 100% heating power
NI = Standard litres according to ISO 6358

Optional temperature regulation
With CSS (CSSEASY) and Solid state relay (p 58 – 59)

Voltage	V~	3 x 400	3 x 400	3 x 400	3 x 480	3 x 480
Power consumption	kW	5.5	11	17	8.0	16
LE 10 000 DF-R	Order no	146.796	146.479	146.797	146.942	146.946
LE 10 000 DF	Order no	115.571	114.555	116.135	117.276	117.759
LE 10 000 DF*	Order no			130.865		

Voltage	V~	3 x 400	3 x 480
Power consumption	kW	15	15
LE 10 000 DF-R HT	Order no	146.850	
LE 10 000 DF HT	Order no	116.056	117.313

*sealed

Additional versions available on request

Accessories LE 5000 DF

	152.371 Inlet flange Ø 60 mm
	152.372 Outlet flange Ø 62 mm
	152.905 Outlet flange Ø 92.5 / 60.7 x 3 mm
	152.441 Sealing inlet 152.443 Sealing outlet
	152.520 Adapter Ø 60 mm (inside) to Ø 90 mm (outside)
	152.522 Adapter Ø 62 mm (inside) to Ø 92 mm (outside)

Accessories LE 10000 DF

	152.373 Inlet flange Ø 90 mm
	152.374 Outlet flange Ø 92 mm
	152.906 Outlet flange Ø 121.5 / 89.5 x 3 mm
	152.442 Sealing inlet 152.444 Sealing outlet
	152.521 Adapter Ø 90 mm (inside) to Ø 60 mm (outside)
	152.523 Adapter Ø 92 mm (inside) to Ø 62 mm (outside)

The inlet sides special design and materials allow for high air inlet temperatures.

The electrical supply's functioning and safety are guaranteed even under extreme conditions.

The new double-flange air heaters are manufactured using Leister's well-known high quality standards.

High degree of manufacturing quality



photos: Type LE 5000 DF-R

High quality temperature resistant cable




Robust structural design




Designing hot air systems correctly.

Knowledge of the physical properties of all the components used is essential for the correct design of hot air equipment and systems. Two values are of particular importance to the user: Pressure loss depending on air flow and Temperature depending on air flow. Both values are additionally dependent on the heating output of the air heater.


With the construction of a unique measurement system, LEISTER has laid the foundations for the correct physical specification of these interrelationships. For this, systematic measurements across the entire area of utilization of the air heaters and a calculation of the models with the aid of dimensionless key indicators is necessary. As a result, the interconnections of pressure loss, volumetric flow and temperature can be displayed in relation to standard conditions.

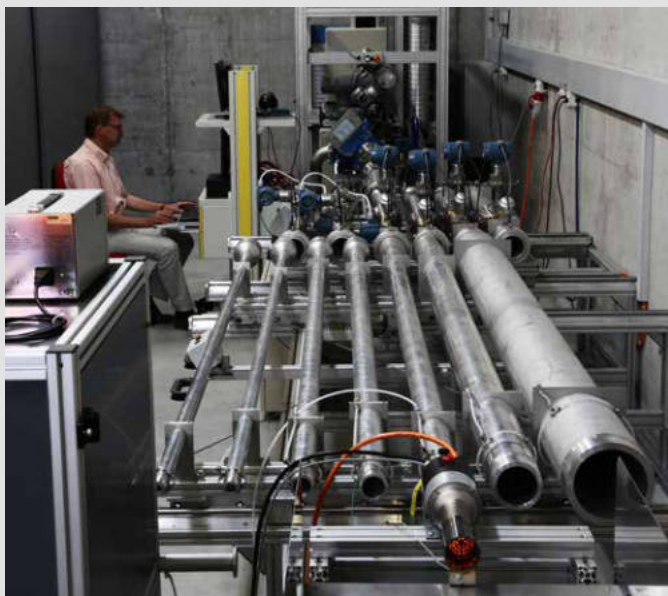

Leister measurement apparatus.

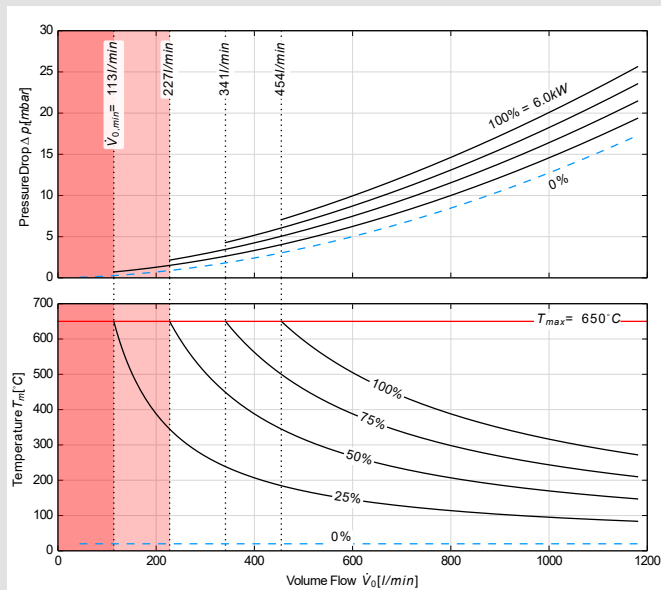

Example of pressure loss and temperature curves for an air heater of the type LHS 61S SYSTEM(3 × 400 V / 6 kW).

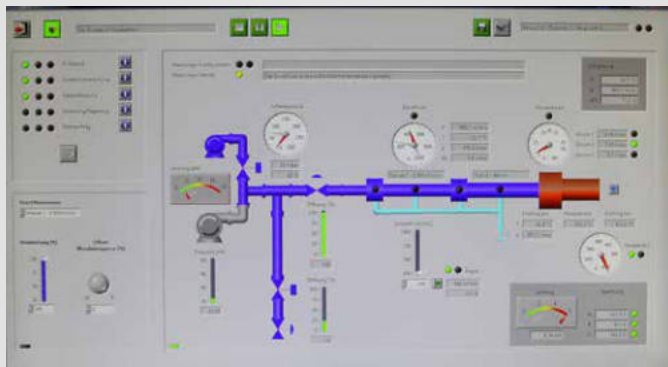

Monitoring system



LE 5000 HT-U & LE 5000 HT-S

Hot Air High Speed Side Sealing

Leister hot air side sealing

LE 5000 HT-U & LE 5000 HT-S



LE 5000 HT-U



LE 5000 HT-S

Air Heaters
Controllers

- Reduction of CO2 Footprint
- Factory Safety Requirements
- Operator Safety
- Energy Efficiency
- Process Reproducibility

The hot air sealing unit for liquid packaging include two different units: The LE 5000 HT-U air heater has the hot air outlet on the upper side, while the LE 5000 HT-S blows the hot air downwards. The air outlet openings are designed precisely for welding the longitudinal seam in liquid packaging. Thanks to the great thermal insulation on the units, the maximum amount of energy is implemented in the weld seam.

The sealing unit arrives a production speed up to 700 m/min and operate with an air temperature at 900°C. The customer can control the sealing units very easy on temperatures and airflow, this makes the process much more precise than a process with gas flame.



Hot Air versus Gas Flame

CO₂Footprint: To reduce the CO₂footprint hot air offers the option to consume the power from renewable resources like wind power, solar power, etc. Gas cannot offer this benefit since it requires fossil resources.












Factory Safety Requirements: Using hot air eliminates all the costly safety requirements for gas.

Operator Safety: There is no open flame with hot air. Hot air systems are enclosed in organic fiber based ceramics and have a very low surface contact temperature even though the process operates at 900 °C.

Energy Requirement: Typical energy consumption for a flame sealer with gas burners is appropriately 90 kW. Hot air systems also use approximately 90 kW.

Process Reproducibility: Setting up the machine for each type of board is much easier and more precise with electric heaters. The welding seam is much more precise.

Accessories LE 5000 HT-U / LE 5000 HT-S

	137.720 E5CC temperature controller, 100-240 V		107.287 Hose clip ø 38/60 mm
	159.220 Semiconductor relay, 3 x 600V/40A		107.291 Hose connection adapter ø 62 mm, 1 output
	103.429 ROBUST, 3 x 230/400V 50Hz, 3 x 265/460V 60Hz		152.371 Inlet flange, ø 60 mm
	153.358 Frequency converter C200-012, 230V		152.441 Gasket HT LE 5000 DF, inlet
	166.237 Air hose ø 38 mm, silicone, temperature-resistant		Fastening 163.535 LE 5000 HT-U (2 units) 163.536 LE 5000 HT-S (2 units) 163.596 LE 5000 HT-U (3 units) 163.598 LE 5000 HT-S (3 units) 163.604 LE 5000 HT-U (4 units) 163.606 LE 5000 HT-S (4 units)
	107.354 Stainless steel filter, slidable to the suction side		

Temperature regulators: The masters of precision.










Leister temperature regulators allow the air temperature of air heaters and hot-air blowers to be precisely regulated. These regulators are perfectly matched to our Leister devices and facilitate easy and fast installation. They include a digital display for target/actual temperature and two freely programmable alarm outputs.

Temperature controller
CSS EASY

Temperature controller
CSS




Temperature controller
E5CC



			
Technical Data	CSS EASY	CSS	E5CC
Suitable for Leister air heaters	LHS SYSTEM	LHS SYSTEM, LE MINI SENSOR Universally deployable temperature regulator	LE 5000/10 000 DF+ SSR, LHS Classic + SSR, LE 5000/ 10 000 HT + SSR, MISTRAL
Regulation type	PID	PID	PID
Ready to use with preconfigured parameter set	•	• (for LHS SYSTEM, MISTRAL SYSTEM, HOTWIND SYSTEM, VULCAN SYSTEM)	•
Accuracy	> 0.2 % of scale value at 25 °C	> 0.2 % of scale value at 25 °C	> 0.2 % of scale value at 25 °C
Switchover °C / °F	Configurable via keypad	Configurable via keypad	Configurable via keypad
Temperature sensor / input	Type K / socket	Type K, PT100, screw connectors	Type K / PT100, screw connectors
Alarm output	2 independently configurable alarms, Output at 2 floating relay contacts, 4-fold connector block	2 independently configurable alarms, Output at 2 floating relay contacts, Screw connector	2 independently configurable alarms, Output at 2 floating relay contacts, Screw connector
Connection to air heater	RJ-45 socket for Leister Control Cable (see accessories)	Screw connectors	Via SSR with PWM signal or 4-20mA
Voltage	100 – 240 VAC, max. 8 VA	100 – 240 VAC, max. 8 VA	100 – 240 VAC, max. 8 VA
Mains connection lead	3 m, with Euro plug	Without lead, screw connectors	Without lead, screw connectors
Mechanics	Regulator built into housing, ready to operate, can also be integrated into the front panel, with cut-out 67 × 67 mm	Regulator for front panel integration, with cut-out 45 × 45 mm	Regulator for front panel integration, with cut-out 45 × 45 mm
Dimensions(L × W × H)	175 × 72 × 72 mm	109 × 48 × 48 mm	66 × 48 × 48 mm
Weight kg	0.45	0.20	0.10
Conformity mark			
Protection class II			
Order no.	125.944	123.039	137.720

Controllers and interfaces: The clever combination.

Accessories CSS EASY / CSS


		System Interface cable
	144.030	1 m
	144.028	3 m
	144.026	5 m
One end single wires, one end RJ45		
	106.956	Thermocouple with plug, 1 m cable
		Thermocouple extension cable with plug and connection
	106.958	2 m
	106.960	4 m
	106.962	10 m

Accessories Solid state relay

	159.220	Solid state relay 3 × 600 V / 40 A Input: PWM
	133.540	Solid state relay 1 × 230 V / 15 A Input: PWM

Air Heaters
Controllers



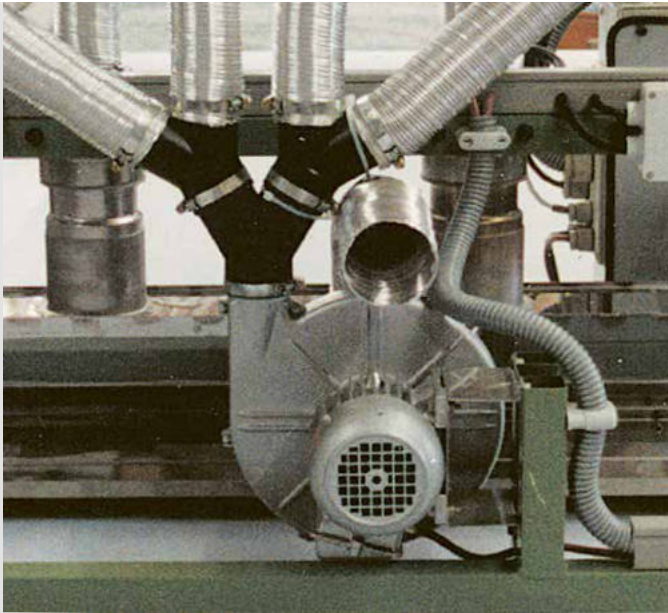

Blowers / Frequency Converters

RBR	62
SILENCE	63
ASO	64
ROBUST	65
AIRPACK	66
MONO	67
Accessories	68 / 69
Frequency Converters	70
Conversion table	71



Radial Blower Recirculation RBR: The recycling specialist.

The RBR can withstand air temperatures of up to 350°C on the inlet side because of its design making it especially suitable for hot air recycling. By combining the double-flange air heaters type DF-R and other accessories, hot air systems can be constructed that recycle the hot air from the process which saves significant amounts of energy and costs.

Medium pressure blower

RBR




Technical data RBR

Design: radial blower


Frequency	Hz	50	60
Air flow (20 °C)	l/min	16800	20000
Static pressure	kPa	1.75	2.5
Max. ambient temperature	°C	60	60
Max. air inlet temperature	°C	350	350
Noise emission level	dB (A)	61	61
Environmental protection (IEC 60529)		IP 54	IP 54
Outside diameter air inlet	mm	Ø 90	Ø 90
Outside diameter air outlet	mm	Ø 90	Ø 90
Weight	kg	19.0	19.0
Conformity mark		CE	CE
Protection class I		⊕	⊕

Can be controlled with FC (page 62), 20 – 60 Hz

Installation dimensions in mm

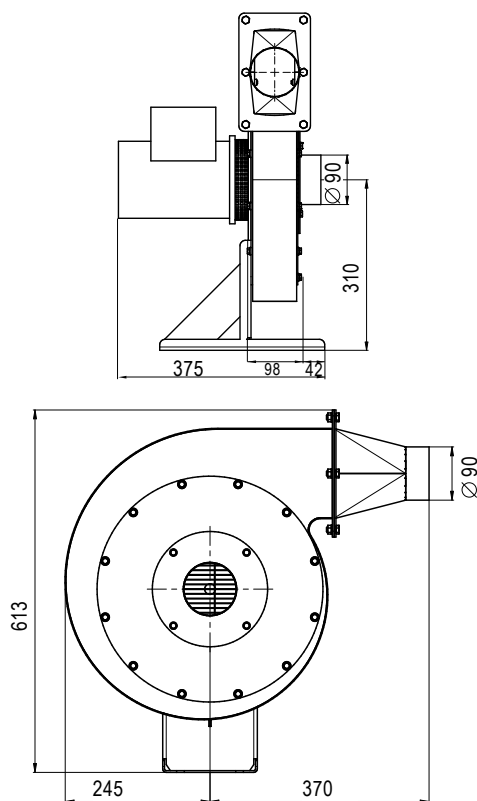

Voltage	V ~ 50 Hz	3 × 230 / 400
	V ~ 60 Hz	3 × 277 / 480
Power consumption	W	550 / 660
Without cable	Order no.	156.049

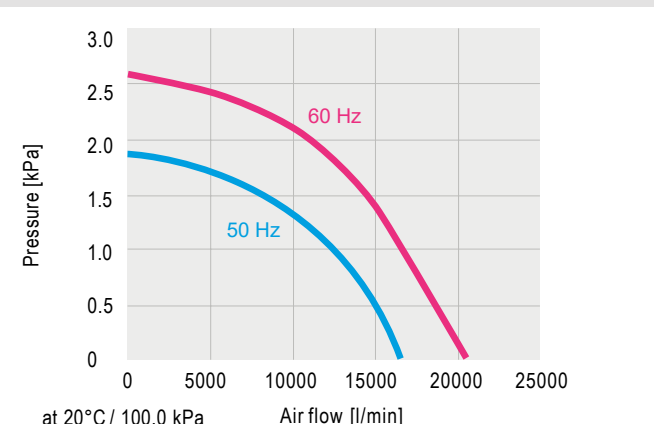

Accessories



SILENCE: The quieter option.


No blower no air! In industrial processes one blower can often supply several air heaters in parallel. Our durable and maintenance-free blowers are a result of uncompromising quality standards and decades of experience. SILENCE, Leister's mid-range blower, is very quiet during operation at 61 dB(A). Developed to withstand operating conditions with air intake temperatures of 100° C to 200° C. Delivers optimum & effortless performance in ambient temperatures up to 75° C.

Medium pressure blower


SILENCE



Technical data SILENCE			
Design: radial blower			
Frequency	Hz	50	60
Air flow (20 °C)	l/min	4700	6000
Static pressure	kPa	1.0	1.4
Max. ambient temperature	°C	75	75
Max. air inlet temperature	°C	200	200
Noise emission level	dB(A)	61	61
Environmental protection (IEC 60529)		IP 54	IP 54
Outside diameter air inlet	mm	Ø 80	Ø 80
Outside diameter air outlet	mm	Ø 60	Ø 60
Weight	kg	9.0	9.0
Conformity mark		CE (ErP n/a)	CE (ErP n/a)
Protection class I		⊕	⊕
Can be controlled with FC (page 62), 20 – 80 Hz			

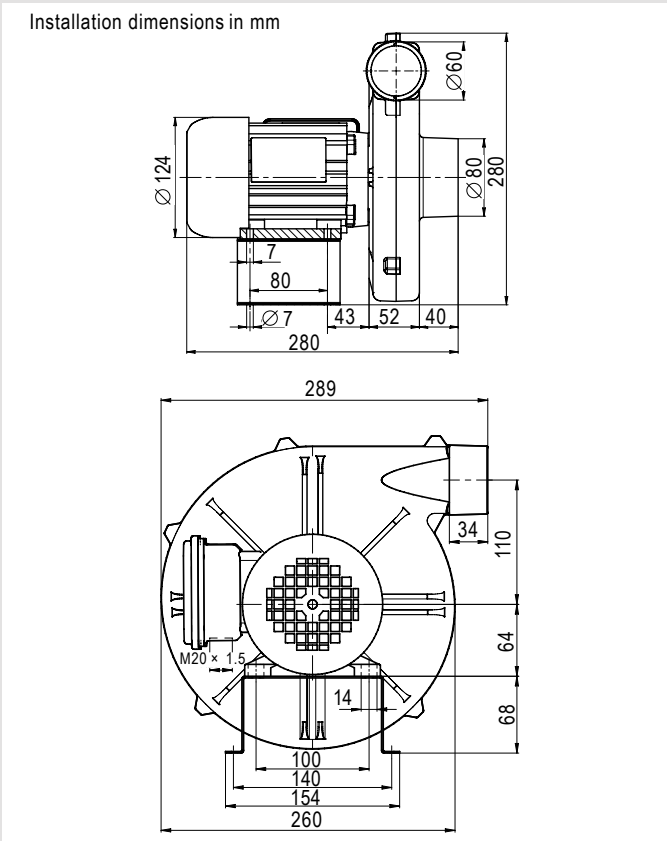

Voltage	V ~ 50 Hz	1 × 230	3 × 230 / 400
	V ~ 60 Hz		3 × 440 – 480
Power consumption	W	250	250
Without cable	Order no.		103.507
3 m cable / Euro plug	Order no.	103.510	
Additional versions available on request			

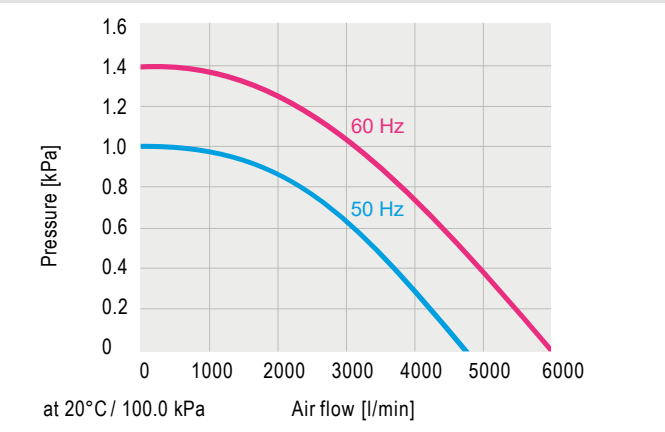

ASO: The air flow giant.

At 60 Hz, the ASO delivers 15 900 l/min. When used with the appropriate accessories it can supply several Leister air heaters in parallel.

Medium pressure blower

ASO




Technical data ASO

Design: radial blower

Frequency	Hz	50	60
Air flow (20 °C)	l/min	13500	15900
Static pressure	kPa	1.6	2.4
Max. ambient temperature	°C	60	60
Max. air inlet temperature	°C	200	200
Noise emission level	dB (A)	70	70
Environmental protection (IEC 60529)		IP 54	IP 54
Outside diameter air inlet	mm	Ø 134	Ø 134
Outside diameter air outlet	mm	Ø 90	Ø 90
Weight	kg	15.0	15.0
Conformity mark		CE	CE
Protection class I		⊕	⊕


Can be controlled with FC (page 62), 20 – 60 Hz

Installation dimensions in mm

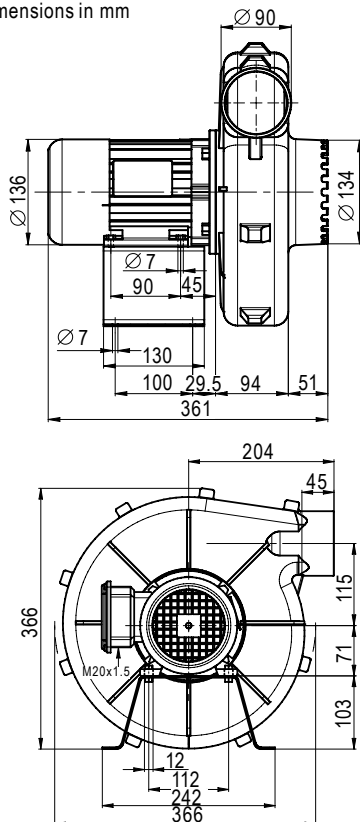

Voltage	V ~ 50 Hz	1 × 230	3 × 230 / 400
	V ~ 60 Hz		3 × 440 – 480
Power consumption	W	550	550
Without cable	Order no.		103.527
3 m cable / Euro plug	Order no.	103.530	

Additional versions available on request

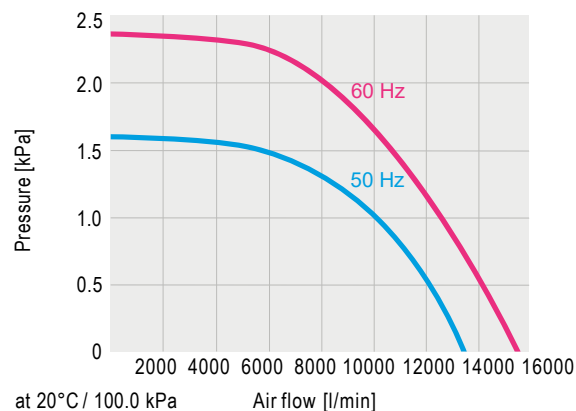

Accessories



ROBUST: The name speaks for itself.


Very compact design with enormous power. Thanks to efficient sound insulation the ROBUST high pressure blower is very quiet. It can be installed in all orientations and is virtually indestructible even under extreme conditions and continuous operation.

High pressure blower


ROBUST



Technical data ROBUST			
Design: Side Channel Blower			
Frequency	Hz	50	60
Air flow (20 °C)	l/min	1200	1300
Static pressure	kPa	8.0	10.5
Max. ambient temperature	°C	60	60
Max. air inlet temperature	°C	60	60
Noise emission level	dB(A)	62	62
Environmental protection (IEC 60529)		IP 54	IP 54
Outside diameter air inlet	mm	Ø 38	Ø 38
Outside diameter air outlet	mm	Ø 38	Ø 38
Weight	kg	8.0	8.0
Conformity mark		CE	CE
Protection class I		⏚	⏚
Can be controlled with FC(page 62), 20 – 60 Hz			

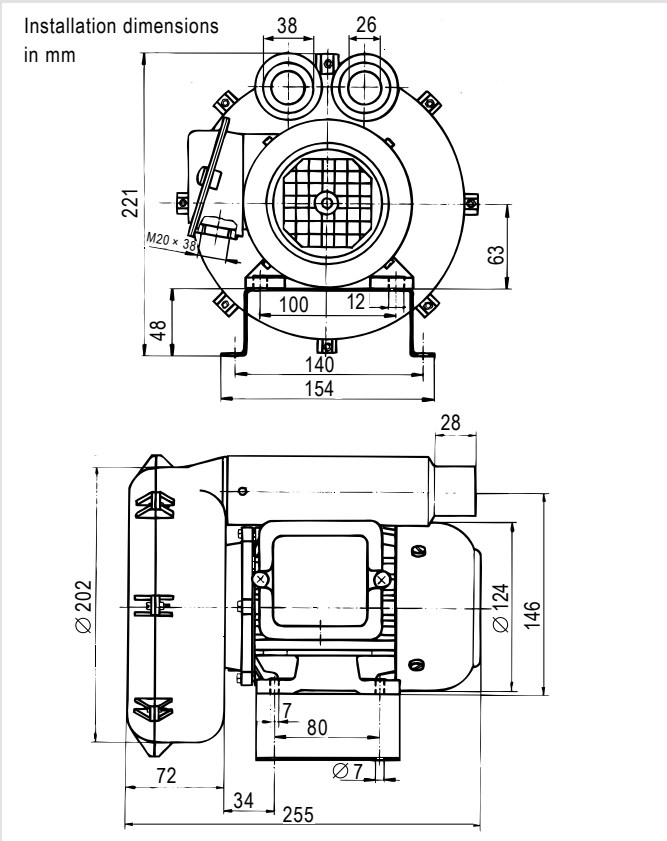

Voltage	V ~ 50 Hz	1 × 120	1 × 230	3 × 230 / 400
	V ~ 60 Hz			3×440– 480
Power consumption	W	250	250	250
Without cable	Order no.	103.434		103.429
3 m cable / Euro plug	Order no.		103.432	
Additional versions available on request				

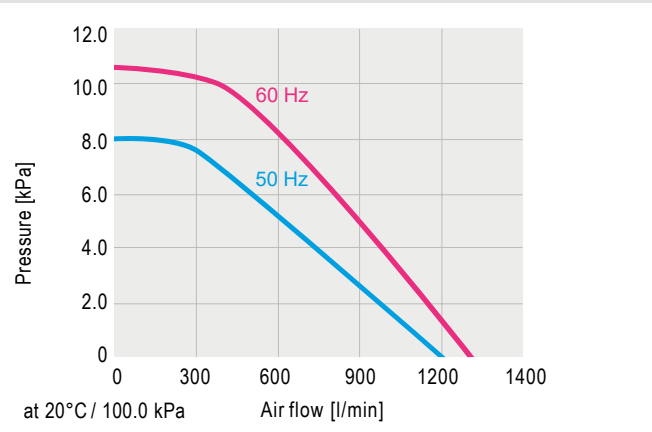

AIRPACK: The full pressure provider.

If high air pressure is required, the AIRPACK is the answer! It is used wherever large air volumes at high pressure are required. Its impressive power means it can supply several Leister air heaters in parallel. The AIRPACK delivers sufficient pressure to efficiently supply Leister blow-off nozzles.

High pressure blower

AIRPACK




Technical data AIRPACK
Design: Side Channel Blower

Frequency	Hz	50	60
Air flow (20 °C)	l/min	3900	4500
Static pressure	kPa	30.0	30.0
Max. ambient temperature	°C	40	40
Max. air inlet temperature	°C	40	40
Noise emission level	dB (A)	73	73
Environmental protection (IEC 60529)		IP 54	IP 54
Outside diameter air inlet	mm	Ø 60	Ø 60
Outside diameter air outlet	mm	Ø 60	Ø 60
Weight	kg	26	26
Conformity mark		CE	CE
Protection class I		⊕	⊕


Can be controlled with FC (page 62), 20 – 60 Hz

Installation dimensions
in mm

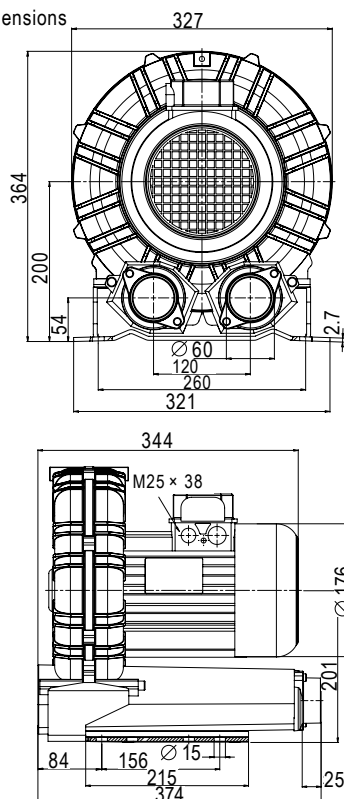

Voltage	V ~ 50 Hz	3 × 230 / 400
	V ~ 60 Hz	3 × 440 – 480
Power consumption	W	2200
Without cable	Order no.	119.358

Additional versions available on request

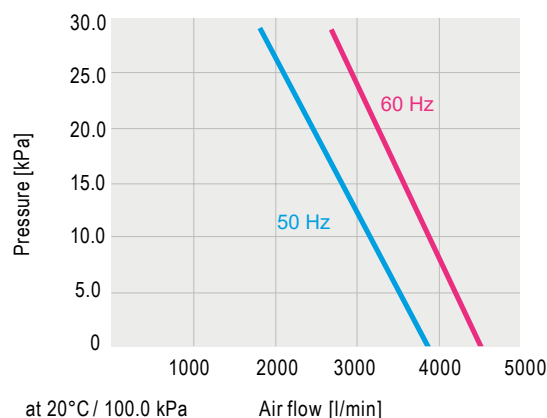

Accessories



MONO: Compact with high performance.

In spite of its compact dimensions, the newly-developed, MONO 6 SYSTEMblower continues to impress due to its high air volume of up to 600 l/min. One of its new features is the ability to adjust the air volume, either on the device itself, via the “e-drive” operating unit, or through the external interface. As a result, the blower can be adapted perfectly to suit every application. With its maintenance-free, brushless motor, the blower is ideal for continuous operation.

High pressure blower MONO 6 SYSTEM




Technical data


Frequency	Hz	50 / 60
Air flow (20 °C)	l/min	250 – 600
Static pressure	kPa	3.6
Max. ambient temperature	°C	60
Outside diameter air outlet	mm	Ø 38
Weight with 3 m cable	kg	1.0
Conformity mark	CE (ErP n/a)	
Protection class II	□	

Voltage	V ~	230	120
Power consumption	W	120	120
Order no.		146.702	149.638

Installation dimensions in mm

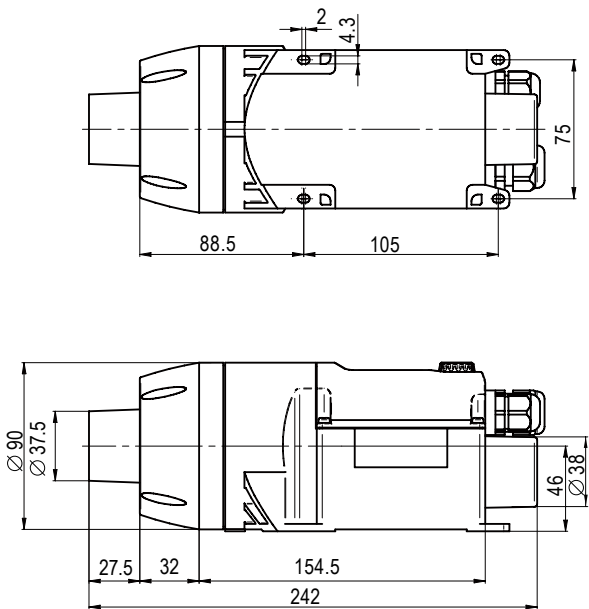

- Adjustable air volume
- Compact and efficient
- “e-drive” operating unit
- Brushless motor
- Tool protection
- System interface
- Mounting tabs

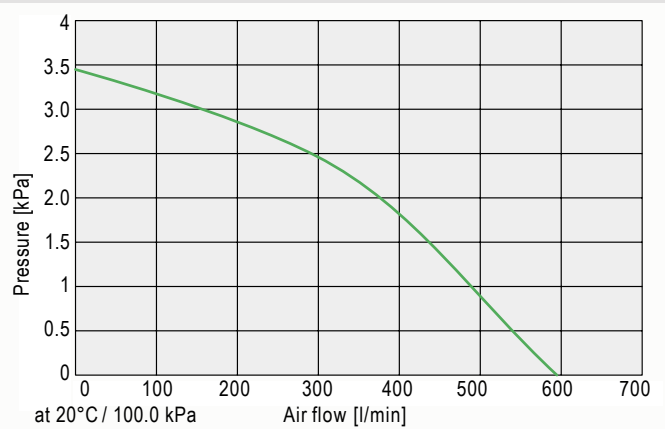

Accessories

Accessories SILENCE (Ø 60 mm)




	107.288	PVC air hose Ø 60 mm
	107.287	Hose clip for Ø 38 mm and Ø 60 mm air hose
	107.240	Closing cap Ø 60 mm attachable to hose connection adaptor 107.238 and 107.278
	107.294	Stainless steel filter, push-fit on air intake
	110.887	Motor capacitor 230 V
	107.291	Hose connection adaptor made of PA with 1 air outlet for Ø 38 mm hose, push-fit on air outlet
	107.278	Hose connection adaptor made of PA, push-fit on air outlet
	107.292	Hose connection adaptor made of PA with 2 air outlets for Ø 38 mm hose, push-fit on air outlet
	107.293	Hose connection adaptor made of PA, push-fit on adaptor 107.292
	107.295	Manually-operated air flow adjuster Size 214 x 88 x 133 mm
	107.296	Air flow off/on switch The air flow is interrupted on command (pneumatic 500 kPa) to the heaters. Size 214 x 88 x 133 mm

Special nozzles available on request. Leister does not provide any warranty for its products if using non-Leister blowers or accessories.



Accessories ASO (Ø 90 mm)

	107.237	PVC air hose Ø 90 mm
	107.236	Hose clip for Ø 90 mm air hose
	107.239	Stainless steel filter, push-fit on air intake
	111.771	Motor capacitor 230 V
	107.238	Hose connection adaptor made of PA, push-fit

Accessories MONO (Ø 38 mm)

	153.245	Stainless steel filter kit (Ø 38 mm), push-fit on air intake
	107.286	PVC air hose Ø 38 mm
	107.287	Hose clip for Ø 38 mm and Ø 60 mm air hose

Accessories RBR (Ø 90 mm)

	Air hose HT, temperature resistant up to + 350 ° C, insulated	
	152.439	Ø 60 mm, 2 m
	152.440	Ø 60 mm, 5 m
	155.419	Ø 90 mm, 2 m
	155.420	Ø 90 mm, 5 m
	152.518	Hose clip inside for Hose HT Ø 60 bridge type 55 - 75 mm
	152.519	Hose clip outside for Hose HT Ø 60 bridge type 85 - 105 mm
	155.421	Hose clip inside for Hose HT Ø 90 bridge type 95 - 115 mm
	155.422	Hose clip outside for Hose HT Ø 90 bridge type 125 - 145 mm

The combination of blow-off nozzles and blowers allows fast and efficient drying of beverage bottles.



Accessories ROBUST (Ø 38 mm)

	113.859 PVC air hose Ø 14 mm 107.350 PVC air hose Ø 19 mm 107.286 PVC air hose Ø 38 mm 166.237 Silicone air hose Ø 38 mm, temperature resistant up to 250°C
	107.290 Hose clip for Ø 19 mm air hose
	107.242 Closing cap Ø 19 mm, attachable to hose connection adaptor 107.298
	107.354 Stainless steel filter, push-fit on air intake
	108.623 Motor capacitor 230 V~ 104.017 Motor capacitor 120 V~
	107.298 Hose connection adaptor made of PA, push-fit on ROBUST blower and adapter 107.293 for hose connection
	107.281 Hose connection adaptor made of PA (Ø 38 mm), 3 outputs, each 14 mm
	107.287 Hose clip for air hose Ø 38 mm and Ø 60 mm
	107.241 Closing cap Ø 38 mm, attachable to hose connection adaptor 107.292 and 107.293
	107.293 Hose connection adaptor made of PA, push-fit
	108.755 Hand operated air flow adjuster and on/off switch. Size 214 × 88 × 133 mm
	107.299 Air flow off/on switch The air flow is interrupted on command (pneumatic 500 kPa) to the heaters. Size 214 × 88 × 133 mm

Accessories AIRPACK (Ø 60 mm)

	107.287 Hose clip for air hose Ø 38 mm and Ø 60 mm
	107.241 Closing cap Ø 38 mm push-fit on hose connection adaptors 107.292 and 107.293
	107.288 PVC air hose Ø 60 mm
	107.240 Closing cap Ø 60 mm, push-fit on hose connection adaptors 107.278
	107.291 Hose connection adaptor made of PA with 1 air outlet for Ø 60 mm hose. Push-fit on air outlet
	107.292 Hose connection adaptor made of PA with 2 air outlets for Ø 38 mm hose. Push-fit on air outlet
	107.278 Hose connection adaptor made of PA, Push-fit on air outlet
	110.895 Stainless steel filter, push-fit on air intake
	Blow-off nozzle, push-fit Outlet opening adjustable 1 – 5.5 mm 125.907 a = 300 mm 125.908 a = 482.6 mm Connector Ø 60 mm

Special nozzles available on request
Leister does not provide any warranty for its products if using non-Leister blowers or accessories.

Frequency converters: More power for your blower.

Because air volume and heating performance can be set independently, precisely and reproducibly from each other, the C 200-012 and C 200-034 frequency converters improve your hot-air processes. The C 200-012 and C 200-034 give the blowers the flexibility to adjust the air volume up or down.

Frequency converter

C 200-012




Frequency converter

C 200-034



Installation dimensions in mm
C 200

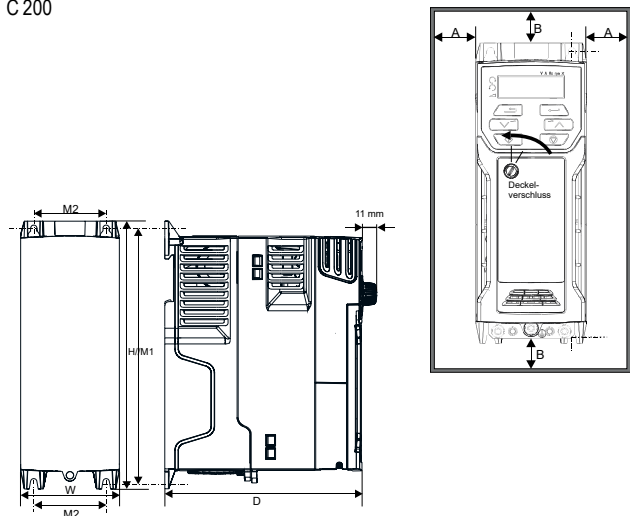

Converter size	H	W	D	M1	M2	Ø	A	B
mm	mm	mm	mm	mm	mm	mm	mm	mm
C 200-012	160	75	130	143	53	5	0	100
C 200-034	226	90	160	215	70.7	5		

Technical data

		C 200-012	C200-034
Input voltage	V	1 × 200 - 240	3 × 380 -480
Max. blower rated power	W	750	2200
Frequency	Hz	50 / 60	50 / 60
Typical input current at full load	A	10.4	9.6
Output rated power (100%)	A	4.2	5.6
Weight	kg	0.7	1.4
Conformity mark		CE	CE
Approval mark		UL	UL
Protection class I		⚡	⚡
Order no.		153.358	153.474

Conversion table

	metric		US-units		Comments
Temperature	100	°C	212	°F	$^{\circ}\text{F} = ^{\circ}\text{C} \cdot 1.8 + 32$
	20	°C	68	°F	
	0	°C	32	°F	
Length	25.4	mm	1	in	
	0.305	m	1	ft	
Weight	1	kg	2.2	lbs	
	0.454	kg	1.0	lbs	
Air flow	28.3	l/min	1	cfm	
	100	l/min	3.53	cfm	
Static pressure	6.89	kPa	1	psi	1 kPa = 10 mbar
	1	kPa	0.145	psi	
Speed	0.305	m/min	1	ft/min	
	1	m/min	3.28	ft/min	
Output	1	kg/h	2.2	lbs/h	
	0.454	kg/h	1	lbs/h	
Energy	1	kJ	0.948	BTU	(british thermal unit)

Useful formulas: Help yourself.

Most industrial processes require energy. Bringing energy into processes requires power and time. The following there are some simple, basic calculations that can give first estimations on required heating power. Additional application tests are always recommended and supported by Leister.

The following formulas are meant as rules-of-thumb. They can be employed as first estimations to plan equipment. The calculated values serve as approximate values. Losses are not considered.

Electric power, current and voltage

$$V = R * I$$

V = Voltage [V]
R = Resistance [Ohm]
I = Current [A]
P = Power [W]

$$P = V * I$$

Example single-phase:

V = 230 V

P = 1 kW (e.g. LHS 21S CLASSIC, 139.869)

$$I = \frac{1000}{230} = 4.35 [A] \quad \Rightarrow \text{single-phase}$$

$$I = \frac{P}{V}$$

⇒ single-phase

Example three-phase:

V = 3 * 400 V

P = 6 kW (e.g. LHS 61S SYSTEM, 3 x 400 V / 6 kW, 142.496)

$$I = \frac{P}{V * \sqrt{3}}$$

⇒ three-phase

$$I = \frac{6000}{400 * \sqrt{3}} = 8.66 [A] \quad \Rightarrow \text{three-phase}$$

Electrical output with voltage differences

$$P_{\text{act}} = \frac{V_{\text{act}}^2}{V_{\text{nom}}^2} * P_{\text{nom}}$$

Example:

V_{act} = 200 V

V_{nom} = 230 V

P_{nom} = 1 kW (e.g. LHS 21S CLASSIC, 139.869)

$$P_{200V} = \frac{200^2}{230^2} * 1000 = 756 [W]$$

P_{act} = effective Power [W]

P_{nom} = nominal Power [W]

V_{act} = effective Voltage [V]

V_{nom} = nominal Voltage [V]

Do not reduce voltage to control power with air heaters from the LHS PREMIUM or the LHS SYSTEMline!

Heating power calculated from air flow and temperature difference

$$P = c_{air} * \frac{1}{60000} * \dot{V} * \rho_{air} * \Delta T$$

Example:

Air flow \dot{V} = 1200 l/min
 Temp. of environment T_{start} = 25 °C
 Target temperature T_{end} = 500 °C

$$P = 1.005 * \frac{1}{60000} * 1200 * 1.204 * (500 - 25) = 11.5 [kW]$$

11.5 kW is the power required to heat the air to the target temperature.

For estimating the needed heating power, please consider:
 Your process may also need energy for other wanted or unwanted effects (losses etc.).

P = Power [kW]
 c_{air} = Heat capacity of air [kJ/kgK]
 \dot{V} = Air flow [l/min]
 ρ_{air} = Density of air [kg/m³]
 ΔT = Temperature difference [°C]
 $\frac{1}{60000}$ = Conversion factors due to chosen units

Specific heat capacity of air c_{air} : 1.005 kJ/kgK
 Density of air ρ_{air} : 1.204 kg/m³
 (at 20°C and 101.3 kPa)

Heat loss via Isolation

$$\frac{Q}{t} = \lambda * \frac{A}{d} * \Delta T = P$$

Example:

Box made from Styrofoam
 Dimensions (H*W*T) = 0.5 m x 1 m x 1 m
 Wall thickness of box = 5 cm
 T inside box = 80 °C
 T outside box = - 20 °C
 Heat conductivity for Styrofoam = 0.05 W/mK
 The surface of the box is
 $A = 2 * (1 * 1) + 4 * (0.5 * 1) = 4 \text{ m}^2$

$$P = 0.05 * \frac{4}{0.05} * 100 = 400 [W]$$

400 W are required to hold the temperature inside the box on 80°C with an environment temperature of -20°C.

P = Power [W]
 Q = Heat energy [J]
 t = Time [s]
 λ = Heat transfer coefficient [W/m²K]
 A = Surface [m²]
 d = Thickness of wall [m]
 ΔT = Temperature difference [°C]

Legal Information

Contents

We take the greatest care in presenting correct, complete and up-to-date information. However, we can assume no responsibility whatsoever for the information offered in this catalog. We reserve the right to modify or update all information at any time without prior notice.

Copyrights and trademarks

All text, images, graphics as well as their arrangement are subject to copyright protection and other laws on the protection of intellectual property. The reproduction, alteration, transmission or publication of this catalog in part or in its entirety, except for personal, non-commercial use, is prohibited in all possible forms.

All the marks featured in this catalog (protected all brand marks, logos and business names) are the property of Leister Technologies AG or third parties and may not be used, permanently downloaded, copied or distributed without prior written consent.

Specifications

Specifications are subject to change at any time without prior notice.

© Copyright by Leister.



Have a look on:
www.youtube.com/user/leisterswitzerland



Like and share us on:
www.facebook.com/leisterworld



Follow us on Twitter:
twitter.com/leisterworld



join us on LinkedIn:
www.linkedin.com/company/leister-technologies-ag



«Leister – the synonym for quality,
innovation and technology. »


« With strong technical and application competence
Leister provides standard products and custom
engineered solutions to all major industries. »

« Recognized as the world-wide leader in
developing and producing quality products. »

« The Leister Group, its employees and distribution
network are committed to being strong and reliable
partners, giving you the opportunity to move your
business forward. »

« Serving all corners of the globe since 1949,
with representation in over 90 countries, we are
local world wide and close to our customers. »

We know how.

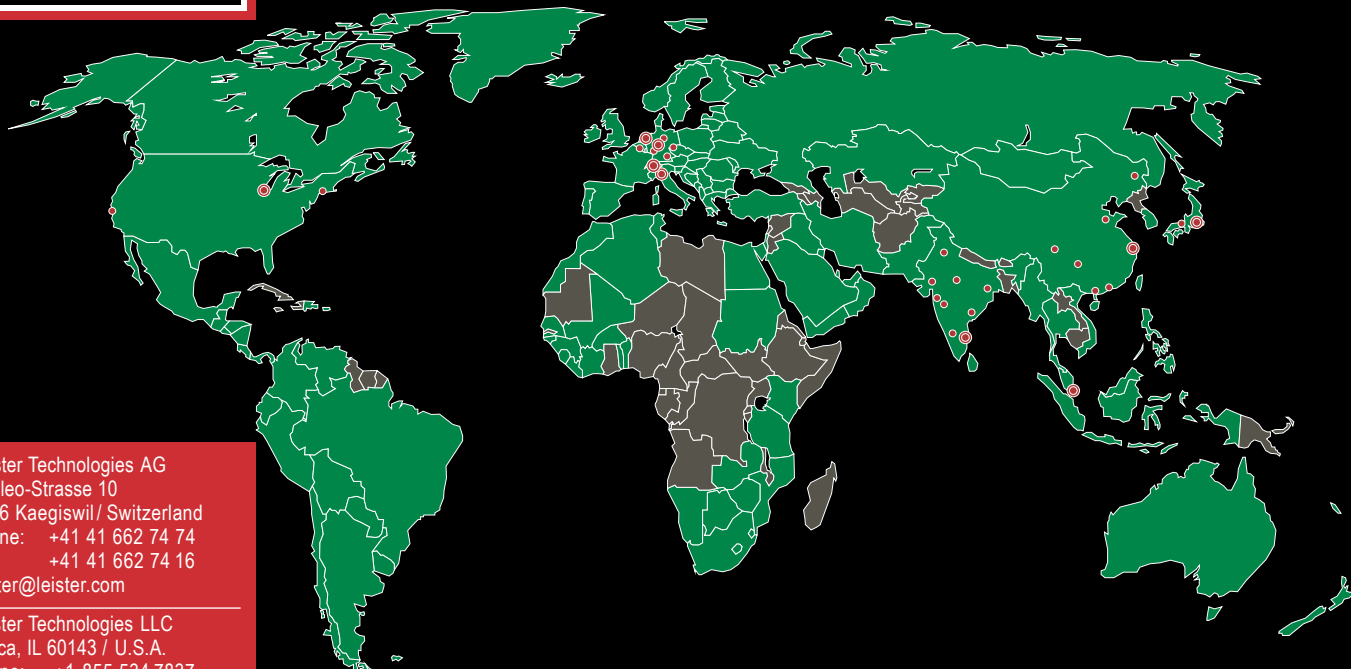

Leister Technologies AG
Galileo-Strasse 10
6056 Kaegiswil / Switzerland
phone: +41 41 662 74 74
fax: +41 41 662 74 16
leister@leister.com

Leister Technologies LLC
Itasca, IL 60143 / U.S.A.
phone: +1 855 534 7837
info.usa@leister.com

Leister Technologies Ltd.
Shanghai 201 109 / PRC
phone: +86 21 6442 2398
leister@leister.cn

Leister Technologies KK
Yokohama 222-0033 / Japan
phone: +81 45 477 3637
sales-japan@leister.com

Leister Technologies Benelux BV
3991 CE Houten / Nederland
phone: +31 (0)30 2199888
info@leister.nl

Leister Technologies Italia s.r.l.
20090 Segrate / Italia
phone: +39 02 2137647
sales@leister.it

Leister Technologies India Pvt
600 041 Chennai / India
phone: +91 44 2454 3436
info@leister.in

Leister Technologies
Deutschland GmbH
58093 Hagen / Germany
phone: +49-(0)2331-95940
info.de@leister.com

Our close worldwide network of more than 130 Sales and Service Centres in more than 100 countries.

Europe:	Sweden	Poland	Chile	Africa:	Asia Pacific:
Andorra	Switzerland	Romania	Colombia	Algeria	Bangladesh
Austria	Turkey	Russia	Ecuador	Botswana	Greater China
Belgium	United Kingdom	Serbia	Peru	Egypt	India
Cyprus	Vatican	Slovakia	Venezuela	Ivory Coast	Indonesia
Denmark	Albania	Slovenia		Kenya	Japan
Finland	Armenia	Ukraine	Central Asia:	Lesotho	Korea
France	Azerbaijan		Kazakhstan	Libya	Malaysia
Germany	Belarus	Americas:	Kyrgyzstan	Malawi	Mongolia
Greece	Bosnia-Herzegovina	Canada	Tajikistan	Morocco	Philippines
Iceland	Bulgaria	Mexico	Turkmenistan	Mozambique	Singapore
Ireland	Croatia	U.S.A.	Uzbekistan	Namibia	Sri Lanka
Italy	Czech Republic	Belize		North Sudan	Thailand
Luxembourg	Estonia	Costa Rica	Middle East:	South Africa	Vietnam
Malta	Georgia	El Salvador	Bahrain	Swaziland	
Monaco	Hungary	Guatemala	Iran	Tunisia	Oceania:
Netherlands	Kosovo	Honduras	Iraq	Zambia	Australia
Norway	Latvia	Nicaragua	Israel	Zimbabwe	New Zealand
Portugal	Lithuania	Panama	Jordan		
Liechtenstein	Macedonia	Argentina	Qatar		
San Marino	Moldova	Bolivia	Saudi Arabia		
Spain	Montenegro	Brazil	U.A.E		

© 2021 Leister Technologies AG, Switzerland

Your Leister Sales and Service Center:

F. Jannone AG

Grünaustrasse 10
CH - 3084 Wabern

Tel. +41 031 960 90 60
Fax +41 031 960 90 61

info@jannone.ch
www.jannone.ch

