


LEISTER

LHS 210/410 DF

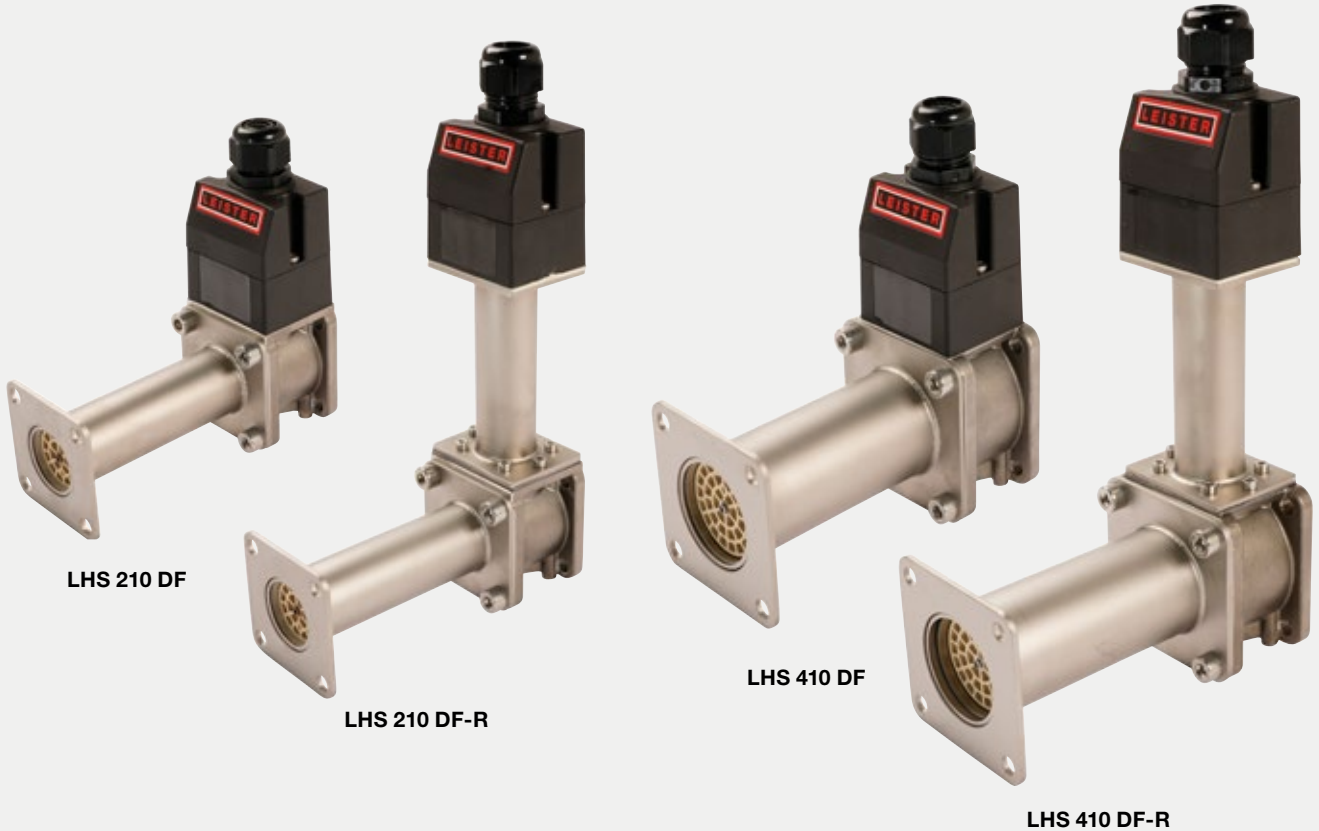

LHS 210 DF

LHS 210 DF-R

LHS 410 DF

LHS 410 DF-R

Air heater series – compact and powerful

The small air heaters with flanges on both sides can be easily integrated into industrial piping systems. The serie DF-R is suitable for processes in which hot air recirculation is required.



Easily integrated into industrial processes



Air heater with large air volume



Ceramic inside protects against overheating

Article numbers

170.920	LHS 210 DF, 120 V/2 kW	170.931	LHS 210 DF-R, 120 V/2 kW
170.921	LHS 210 DF, 230 V/1 kW	170.932	LHS 210 DF-R, 230 V/1 kW
170.922	LHS 210 DF, 230 V/2 kW	170.933	LHS 210 DF-R, 230 V/2 kW
170.923	LHS 210 DF, 230 V/3.3 kW	170.934	LHS 210 DF-R, 230 V/3.3 kW
170.924	LHS 410 DF, 120 V/2 kW	170.935	LHS 410 DF-R, 120 V/2 kW
170.925	LHS 410 DF, 230 V/2 kW	170.936	LHS 410 DF-R, 230 V/2 kW
170.926	LHS 410 DF, 230 V/3.6 kW	170.937	LHS 410 DF-R, 230 V/3.6 kW
170.927	LHS 410 DF, 230 V/4.4 kW	170.938	LHS 410 DF-R, 230 V/4.4 kW
170.928	LHS 410 DF, 400 V/2 kW	170.939	LHS 410 DF-R, 400 V/2 kW
170.929	LHS 410 DF, 400 V/4.4 kW	170.940	LHS 410 DF-R, 400 V/4.4 kW
170.930	LHS 410 DF, 400 V/5.5 kW	170.941	LHS 410 DF-R, 400 V/5.5 kW

Technical Data

	LHS 210 DF	LHS 210 DF-R	LHS 410 DF	LHS 410 DF-R
Dimensions L x W x H [mm]	168 x 67 x 175	168 x 67 x 282	168 x 81 x 186	168 x 81 x 293
Frequency [Hz]	50/60	50/60	50/60	50/60
Max. air outlet temperature [°C]	650	650	650	650
Max. air inlet temperature [°C]	100	350	100	350
Max. ambient temperature [°C]	65	65	65	65
Max. inlet pressure [kPa]	100	100	100	100
Conformity marking	CE c RU us	CE c RU us	CE c RU us	CE c RU us
Protection class I	⊕	⊕	⊕	⊕



LEISTER®

F. Jannone AG

Grünaustrasse 10
CH - 3084 Wabern

Tel. +41 031 960 90 60
Fax +41 031 960 90 61

LEISTER

info@jannone.ch
www.jannone.ch